


$$f_s(\theta) = \begin{cases} \frac{1}{\Delta}, & -\frac{\Delta}{2} \leq \theta \leq \frac{\Delta}{2} \\ 0, & \text{otherwise} \end{cases}$$

PRENTICE HALL



INTRODUCTION TO WIRELESS SYSTEMS

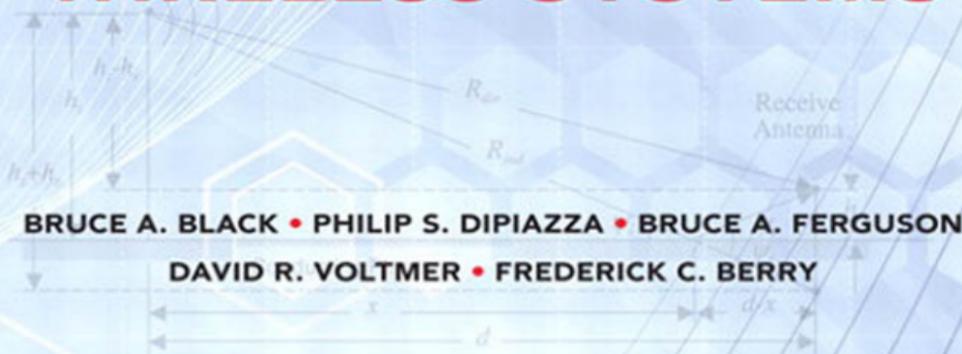

BRUCE A. BLACK • PHILIP S. DIPIAZZA • BRUCE A. FERGUSON
DAVID R. VOLTMER • FREDERICK C. BERRY

Many of the designations used by manufacturers and sellers to distinguish their products are claimed as trademarks. Where those designations appear in this book, and the publisher was aware of a trademark claim, the designations have been printed with initial capital letters or in all capitals.

The authors and publisher have taken care in the preparation of this book, but make no expressed or implied warranty of any kind and assume no responsibility for errors or omissions. No liability is assumed for incidental or consequential damages in connection with or arising out of the use of the information or programs contained herein.

The publisher offers excellent discounts on this book when ordered in quantity for bulk purchases or special sales, which may include electronic versions and/or custom covers and content particular to your business, training goals, marketing focus, and branding interests. For more information, please contact:

U.S. Corporate and Government Sales
(800) 382-3419
corpsales@pearsoned.com

For sales outside the United States please contact:

International Sales
international@pearsoned.com



This Book Is Safari Enabled

The Safari® Enabled icon on the cover of your favorite technology book means the book is available through Safari Bookshelf. When you buy this book, you get free access to the online edition for 45 days.

Safari Bookshelf is an electronic reference library that lets you easily search thousands of technical books, find code samples, download chapters, and access technical information whenever and wherever you need it.

To gain 45-day Safari Enabled access to this book:

- Go to www.informit.com/onlineedition
- Complete the brief registration form
- Enter the coupon code 2PGD-TAFF-EDYT-TQF5-HMDH

If you have difficulty registering on Safari Bookshelf or accessing the online edition, please e-mail customer-service@safaribooksonline.com.

Visit us on the Web: www.informit.com/ph

Library of Congress Cataloging-in-Publication Data

Introduction to wireless systems / Bruce A. Black ... [et al.].

p. cm.

Includes bibliographical references and index.

ISBN 0-13-244789-4 (hardcover : alk. paper)

1. Wireless communication systems. I. Black, Bruce A.

TK5103.2.I62 2008

621.384—dc22

2008005897

Copyright © 2008 Pearson Education, Inc.

All rights reserved. Printed in the United States of America. This publication is protected by copyright, and permission must be obtained from the publisher prior to any prohibited reproduction, storage in a retrieval system, or transmission in any form or by any means, electronic, mechanical, photocopying, recording, or likewise. For information regarding permissions, write to:

Pearson Education, Inc.
Rights and Contracts Department
501 Boylston Street, Suite 900
Boston, MA 02116
Fax: (617) 671-3447

ISBN-13: 978-0-13-244789-8

ISBN-10: 0-13-244789-4

Text printed in the United States on recycled paper at Courier in Westford, Massachusetts.
First printing, May 2008

Preface

This text is intended to provide a senior undergraduate student in electrical or computer engineering with a systems-engineering perspective on the design and analysis of a wireless communication system. The focus of the text is on cellular telephone systems, as these systems are familiar to students; rich enough to encompass a variety of propagation issues, modulation techniques, and access schemes; and narrow enough to be treated meaningfully in a text that supports a single course. The presentation is limited to what cellular systems engineers call the “air interface” and what network engineers call the “physical layer.”

The presentation is unique in a number of ways. First, it is aimed at undergraduate students, whereas most other textbooks written about wireless systems are intended for students either at the graduate level or at the community college level. In particular, the presentation combines a clear narrative with examples showing how theoretical principles are applied in system design. The text is based on ten years’ experience in teaching wireless systems to electrical and computer engineering seniors. The lessons learned from their questions and responses have guided its development. The text not only presents the basic theory but also develops a coherent, integrated view of cellular systems that will motivate the undergraduate student to stay engaged and learn more.

Second, the text is written from a systems-engineering perspective. In this context a “system” comprises many parts, whose properties can be traded off against one another to provide the best possible service at an acceptable cost. A system with the complexity of a cellular network can be designed and implemented only by a team of component specialists whose skills complement one another. Top-level design is the responsibility of systems engineers who can translate market requirements into technical specifications, who can identify and resolve performance trade-off issues, and who can set subsystem requirements that “flow down” to the subsystem designers. The text introduces students to the concept that specialists from a wide range of engineering disciplines come together to develop a complex system. Theory and contemporary practice are developed in the context of a problem-solving discipline in which a divide-and-conquer approach is used to allocate top-level functional system requirements to lower-level subsystems. Standard analysis results are developed and presented to students in a way that shows how a systems engineer can use these results as a starting point in designing an optimized system. Thus an overlying systems-engineering theme ties together a wide variety of technical principles and analytical techniques.

This text comprises eight chapters. An introductory chapter sets out the systems-engineering story. Chapters 2 and 3 introduce the air interface by considering how to provide enough power over a wide enough area to support reliable communication. Chapter 2 introduces the free-space range equation and thermal noise. On completing this chapter, students should be

aware of the dependence of received power on range and of the role of noise in determining how much power is enough for quality reception. Chapter 3 introduces the terrestrial channel and its impairments, including the effects of shadowing and multipath reception. Next, Chapter 4 introduces the principle of frequency reuse and the resulting cellular system structure. The goal of this chapter is to show how a communication system can be extended to provide service over a virtually unlimited area to a virtually unlimited number of subscribers.

Once a power link is established, information must be encoded to propagate effectively over that link. Chapter 5 introduces modulation. The emphasis is on digital techniques common to cellular systems. Of particular interest are frequency efficiency, power efficiency and bit error rate, bandwidth, and adjacent-channel interference. Chapter 5 also introduces spread-spectrum modulation, emphasizing the ability of spread-spectrum systems to provide robust communication in the presence of narrowband interference and frequency-selective fading.

On completion of Chapter 5, students will have an appreciation of the factors involved in designing a point-to-point data link between a single transmitter and a single receiver. Chapter 6 introduces methods for multiple access, including FDMA, TDMA, and an introduction to CDMA. The ability of spread-spectrum systems to support multiple users over a single channel is emphasized.

Wireless systems carry information from a wide variety of sources, from speech to music to video to short text messages to Internet pages. When digitized, information from various sources produces data streams with differing properties. Further, subscribers apply different criteria to assessing the quality of different kinds of received information. Chapter 7 distinguishes streaming from bursty information streams. As second- and subsequent-generation cellular systems are highly dependent on effective use of speech compression, examples are given showing traditional digitization of speech and a brief introduction to linear predictive coding. Chapter 7 concludes with presentations of convolutional coding for error control and the Viterbi decoding algorithm. The systems-engineering story is pulled together in Chapter 8.

This text has been written to support a one-term senior elective course. It is assumed that students taking the course will have completed conventional courses in signals and systems and an introduction to communication systems. The signals and systems background should include a thorough introduction to the Fourier transform. It is also assumed that readers of the text will have completed an introductory course in probability, including coverage of probability density functions, expectations, and exposure to several conventional probability distributions. The material included in this text should be more than sufficient to support a one-semester course. At Rose-Hulman Institute of Technology the book is used to support a one-quarter course that includes four instructional meetings per week for ten weeks. The course covers all of Chapter 2, selections from Chapter 3, all of Chapter 4, and most of Chapter 5. The CDMA material from Chapter 6 is included as time permits.

Introduction

Overview

On the night of April 14, 1912, the RMS *Titanic*, en route from Southampton, England, to New York, struck an iceberg and sank in the North Atlantic. Over fifteen hundred lives were lost when the ship went down, but fortunately for the more than seven hundred passengers and crew who were able to find accommodation in the ship's lifeboats, the *Titanic* was equipped with a wireless system. The *Titanic*'s wireless included a 5 kW rotary spark transmitter built by the Marconi Wireless Company. Distress calls were heard by a number of ships at sea, including the *Carpathia* that arrived on the scene of the disaster several hours later, in time to rescue the survivors.

The wireless traffic between the *Carpathia* and shore stations in North America was widely monitored. News was passed to the press even before the fate of the *Titanic*'s passengers was known. The widespread publicity given to this disaster galvanized public interest and propelled wireless communication into the forefront of attention. The age of wireless communication might be said to have begun with the sinking of the *Titanic*.

As social beings, humans have a fundamental need to communicate. As we grow and learn, so do our communication needs evolve. Dramatic advancements over the past century have made several facts about our evolving communication needs rather apparent: (1) The information that needs to be communicated varies widely; (2) the types and amount of information that needs to be communicated continuously change, typically toward higher complexity; and (3) current technology rarely meets communication demands, so technology evolves. These facts, along with a healthy worldwide economy, produced the wireless revolution in the late twentieth century. Wireless communication is here to stay, and the design principles used to create wireless technology differ enough from those used to create wired communication systems that a separate treatment is necessary.

In this text the process of designing a wireless communication system is presented from the perspective of a systems engineer. Two main goals of the text follow immediately: (1) to present the concepts and design processes involved in creating wireless communication systems, and (2) to introduce the process of systems engineering and the role of a systems engineer to provide an

organizing framework under which to introduce the wireless system concepts. In the industrial world, the design process flows in an organized manner from problem definition, through conceptual and detailed design, to actual deployment. In this text, information from first principles to advanced topics is presented in a fashion compatible with systems-engineering design processes, which are required to manage the development of complex systems.

In Chapter 1 the problem of moving information wirelessly from any point A to any point B is introduced. In every engineering endeavor it is important to have a clear understanding of the problem to be solved before beginning, and so the system and its requirements are defined. The role of a systems engineer and the methods of systems engineering are introduced as the perspective for conducting our study and design.

Chapter 2 presents the most fundamental element of our wireless system, the radio link that connects points A and B. This chapter addresses two issues: how radio waves propagate in space, and how much power must be provided at point B to ensure a desirable quality of communication service. This chapter focuses on propagation in free space and the development of the **range equation**, a mathematical model familiar to both radio and radar engineers. We introduce the antenna as a system element and the antenna design engineer as a member of the design team. To answer the question of how much power is enough, we develop models and analysis tools for thermal noise and describe how thermal noise limits performance. Signal-to-noise ratio (SNR) is introduced as a measure of system performance. Finally, the concept of link budget, a fundamental tool for radio frequency (RF) systems engineering, is presented and supported with examples.

Chapter 3 focuses on signal propagation in the real world. Obstacles in the signal path and indeed the very presence of the Earth itself modify a signal as it travels between endpoints. Various terrestrial propagation models are presented and discussed. These models provide methods for predicting how a signal will propagate in various types of environments. The phenomena associated with shadow fading, Rayleigh fading, and multipath propagation are described as well as the effects of relative motion of a receiver and of objects in the environment. Statistical methods are developed that allow engineers to create robust designs in an unstable and changing environment. Receiver design and channel modeling are added to the list of design functions that a systems engineer must understand to competently interact with team members who specialize in these design disciplines.

Given a basic understanding of methods to ensure that an adequate signal can be conveyed between two endpoints, we discuss the concepts and complexities involved in allowing many users in a large area to share a common system. Geographic diversity and frequency reuse are discussed and used as the basis for developing the “cellular” concept in Chapter 4. The cellular concept is the fundamental basis for designing and deploying most wireless communication systems that must provide service for many users over a large geographic area. The chapter describes how engineers using cellular engineering techniques plan for growth in user capacity and coverage area. Traffic engineering and the use of the Erlang formula as tools for predicting and designing a system for user capacity are demonstrated. At this stage of the design, system-level concerns are well above the device or subsystem level.

In Chapter 5 we describe the methods used to convey information over the wireless link. The process for conveying information using a radio signal, called modulation, is described from a trade-off perspective. The characteristics of several digital modulation schemes are developed and their attributes are compared. The key design parameters of data throughput, error rate, bandwidth, and spectral efficiency are contrasted in the context of optimizing a system design. Also in this chapter we introduce spread-spectrum signaling. Spread spectrum is a modulation technique that broadens the bandwidth of the transmitted signal in a manner unrelated to the information to be transmitted. Spread-spectrum techniques are very effective in making signals resilient in the presence of interference and frequency-selective fading. Our study of spread-spectrum techniques continues in Chapter 6, as these techniques provide an important basis for multiple-access communications.

The first five chapters provide all of the fundamental elements of system design for providing radio coverage to many users over a large area and for designing the components that support the conveying of information at a given quality of service (QoS) across a wireless link between individual users. Chapter 6 introduces various methods that allow many users to access the system and to simultaneously use the resources it provides. In this chapter we introduce the classical methods of frequency-division and time-division multiple access, as well as spread-spectrum-based code-division multiple access which allows independent users to share the same bandwidth at the same time. In providing a multiple-access capability, a systems engineer unifies a variety of system-level design activities to make the system accessible to a varying number of users.

People wish to communicate different types of information, and the information they want to communicate comes from a variety of sources. Chapter 7 discusses several of the types and sources of information commonly communicated in contemporary wireless systems. The required QoS that is to be provided to a system's users must be accounted for in nearly every aspect of a system design. Users' perceptions of what constitutes good quality vary for different types and sources of information and always depend on how well a signal representing the information is preserved in the communication process. Chapter 7 discusses some of the fundamental relationships between the perceptual measures of QoS and specific system design parameters. Understanding these relationships allows a systems engineer to design for predictable QoS at minimum cost. As modern wireless systems are designed to carry information in digital form, a major part of this chapter is about efficient digitization of speech. We discuss two general categories of speech "coding": waveform coding and source coding. As an example of the waveform coding technique we examine traditional pulse code modulation (PCM). Our example of source coding is linear predictive coding (LPC). This latter technique has been extremely successful in providing high-quality, low-bit rate digitization of voice signals for cellular telephone applications. Following the discussion of speech coding, the chapter concludes with an example of coding for error control. Convolutional coding is used for this purpose in all of the digital cellular telephone systems. We introduce the coding method and the widely used Viterbi decoding algorithm.

Chapter 8 wraps up the presentation with a review of the lessons developed in the preceding chapters. This is followed by an overview of the generations of cellular telephone systems and a look into the future at the way wireless systems are evolving to provide an increasing array of

services at ever-higher quality. As wireless systems evolve, they tend to become more complicated. Thus the role of the systems engineer in managing the design process and in understanding the myriad of design trade-offs and interactions becomes ever more important.

System Description

What Is a Wireless System?

In the most general sense, a wireless system is any collection of elements (or subsystems) that operate interdependently and use unguided electromagnetic-wave propagation to perform some specified function(s). Some examples of systems that fit this definition are

- Systems that convey information between two or more locations, such as personal communication systems (PCS), police and fire department radio systems, commercial broadcast systems, satellite broadcast systems, telemetry and remote monitoring systems
- Systems that sense the environment and/or objects in the environment, including radar systems that may be used for detecting the presence of objects in some region or volume of the environment and measuring their relative motion and/or position, systems for sensing or measuring atmospheric conditions, and systems for mapping the surface of the Earth or planets
- Systems that aid in navigation or determine the location of an object on the Earth or in space

Each of these systems contains at least one transmitting antenna and at least one receiving antenna. In the abstract, an antenna may be thought of as any device that converts a guided signal, such as a signal in an electrical circuit or transmission line, into an unguided signal propagating in space, or vice versa. We note in passing that some systems do not need to transmit and receive simultaneously. For example, the WiFi local area network computer interface uses a single antenna that is switched between transmitter and receiver. Specifically, a pulse of energy is transmitted, after which the antenna is switched to a receiver to detect the response from the network access point.

As the examples show, some systems may be used to convey information, whereas others may be used to extract information about the environment based on how the transmitted signal is modified as it traverses the path between transmitting and receiving antennas. In either case, the physical and electromagnetic environment in the neighborhood of the path may significantly modify the signal. We define a **channel** as the physical and electromagnetic environment surrounding and connecting the endpoints of the transmission path, that is, surrounding and connecting the system's transmitter and receiver. A channel may consist of wires, waveguide and coaxial cable, fiber, the Earth's atmosphere and surface, free space, and so on. When a wireless system is used to convey information between endpoints, the environment often corrupts the signal in an

unpredictable¹ way and impairs the system's ability to extract the transmitted information accurately at a receiving end. Therein lies a major difference between wired and wireless systems. To provide a little further insight, we compare some of these differences.

The signal environment or channel characteristics of a single-link wired system are rather benign.

- At any instant of time, the path between endpoints is well known and many of its degrading effects upon a signal can be measured and compensated for.
- Signal dropout (signal loss), momentary or otherwise, is very rare.
- Random effects such as “thermal noise” and “interference” are fairly predictable and controllable and therefore less likely to corrupt the signal to the extent of unintelligibility.
- The signal environment does not change or changes very slowly with time.
- The endpoints do not move.

In contrast, the signal environment of a wireless system is hostile.

- The direction of the signal cannot be completely controlled, and the path between endpoints is not unique.
- The path between endpoints is time-varying.
- Signal dropouts are frequent.
- Noise and interference levels are often difficult to predict and time-varying.
- Objects in the path between and surrounding the endpoints affect the signal level and its content.
- Variations in the signal environment change with geographic location, seasons, and weather.
- For mobile systems, as in cellular and PCS systems, at least one of the endpoints may be moving at an unknown and sometimes significant speed.

As an everyday example, the differences between wired and wireless systems may be compared to the difference between carrying on a conversation with someone in the environment of your living room versus conversing in the environment of a busy airport runway. The same principles of communication theory apply to the design of both wired and wireless communication systems. In addition to those specific functions associated with the unguided propagation of signals, however, the most profound differences between the implementations of wired and wireless communication systems relate to overcoming the signal impairments introduced by a changing wireless channel and, for mobile systems, compensating for the possible motion of the endpoints.

1. The term *unpredictable* is used in the sense that the signal cannot be perfectly determined at any point in space. As we will see, however, we can infer a great deal about a signal using statistical modeling. These models are a fundamental basis for system design.

In addition to providing the fundamental basis for the design of wireless communication systems, the principles of communication theory, RF engineering, and propagation in real-world environments also apply to a host of other applications. As examples, these principles apply to a multitude of radar applications, including object or target detection, location and ranging, speed/velocity measurement, terrain mapping, weather monitoring, and navigation. In fact, many of the techniques used to develop modern personal communication systems were originally developed and proved for radar applications. In contrast to wireless communication systems that convey information between endpoints, radar systems analyze the way transmitted signals are reflected and modified by the presence of objects or variations along the signal path to extract information about the objects or the environment that the signal traverses. As a simple example, consider that a narrow pulsed-RF signal is transmitted in a given direction. Objects within the transmission path reflect some fraction of the signal incident upon them. If a receiver colocated with the transmitter detects an approximate replica of the transmitted signal sometime after the transmitted signal is sent, it is reasonable to assume that an object is located in the direction of transmission and the distance to the object is proportional to the time delay between transmitted and received signals. If no signal is detected within a specified period of time, it is assumed that there are no reflecting objects in the path of the signal, over a given range.

Clearly our general definition of a wireless system fits a vast range of seemingly unrelated applications. It is profoundly important, however, to recognize that all of these applications are founded on a common set of enabling principles and technologies encompassing communication theory, RF engineering, and RF propagation. Although the focus of this text is personal communication systems, the principles and techniques to be presented provide a strong foundation for study of other wireless system applications.

General Architecture, Basic Concepts, and Terminology

At a high level, every communication system is described by a common block diagram. In this section we present a basic functional description of each of the blocks to introduce some of the terminology of wireless systems and to help motivate later discussion of each of the functions.

We begin by considering the general block diagram of a wireless system for a generic application as shown in Figure 1.1. Many of the blocks and their functions apply to both wired and wireless communication systems. Note, however, that the blocks contained within the dashed outline are fundamental and necessary to wireless systems. With the exception of the antennas, all of the remaining blocks may also be found in wired system applications.

The box labeled “Information Source” includes all functions necessary to produce an electrical signal that adequately represents the actual information to be communicated between end users. The term **end user** refers to a person or device that is the source or recipient (sink) of the information to be communicated. The term **endpoint** refers to the location of the transmitters and receivers in the communication path. End users may or may not be colocated with the endpoints. The functions of the Information Source box might include

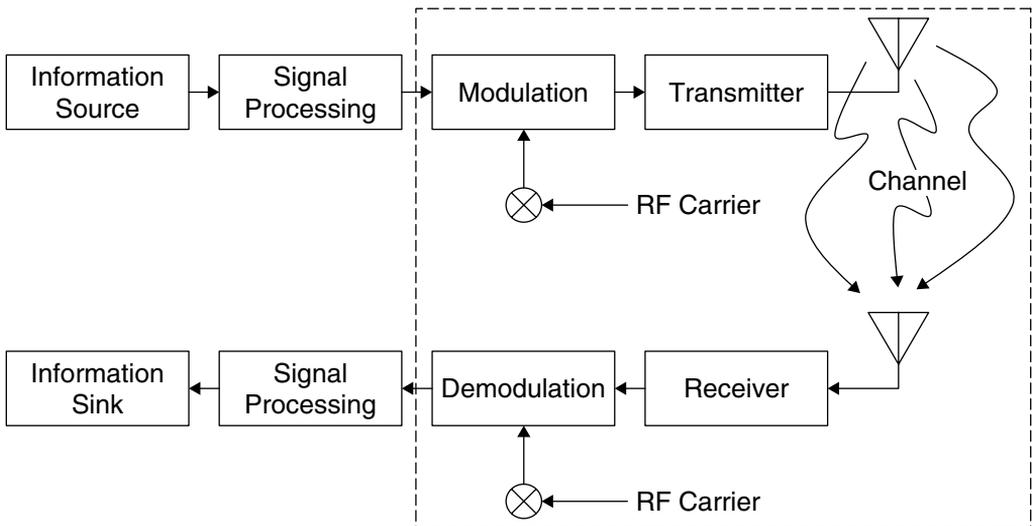


Figure 1.1 A Wireless System

- Creation of an analog waveform representing speech derived from a microphone, or creation of a digital bit stream resulting from sampling of an analog waveform
- Formatting digital information such as data, text, sampled audio, images, video, and so forth

The signals from information sources are typically bandlimited; that is, they contain frequencies from DC (or near DC) to some nominal cutoff frequency. They are termed **baseband signals**.

The box labeled “Signal Processing” encompasses all operations necessary to convert information signals into waveforms designed to maximize system performance. Signals may be processed to increase capacity, throughput, intelligibility, and accuracy and to provide other auxiliary functions. In modern wireless systems, many of the signal-processing functions are aimed at improving signal reception by mitigating the corrupting effects of the transmission medium or environment. Signal-processing functions on the transmitting end may include

- Converting analog signals to digital signals of a specific type
- Shaping signals to minimize the corrupting effects of the environment or transmission medium
- Compressing and coding signals to remove redundancies and improve throughput
- Coding signals to aid in the detection and correction of errors caused by the environment
- Encryption of signals for privacy
- Multiplexing information from several sources to fully utilize the channel bandwidth
- Adding information that simplifies or enhances access and control for the endpoints or end users

Signal processing may also include digital modulation, a technique used to spread the signal spectrum by coding one or more bits into a substantially longer bit stream. We will say more about digital spread spectrum and its benefits in a later chapter.

Signal processing, especially digital signal processing (DSP), has dramatically enabled rapid advances in the state of the art of communications in general and wireless personal communications in particular. The majority of topics to be covered in this text, as in any text on modern communications, will focus on some aspect of signal processing.

The efficient radiation of an electrical signal as an electromagnetic wave requires that the physical size of the antenna be comparable in size to the wavelength of the signal. This is also true for the reception of such an electromagnetic wave. This physical limitation renders the radiation of baseband signals impractical. As an example, consider the size requirement for radiating a 10 kHz signal. Recall from basic physics that the wavelength of a signal is related to its frequency by

$$\lambda = c/f, \quad (1.1)$$

where c is the speed of light in free space, 3×10^8 m/s. The wavelength of a 10 kHz signal is about 98,000 feet. If a typical quarter-wavelength ($\lambda/4$) antenna were used, it would be 24,600 feet or 4.7 miles in length. In contrast, $\lambda/4$ antennas in the cellular (900 MHz) or PCS (2 GHz) bands are 3.3 inches and 1.5 inches long, respectively. For this reason, practical wireless systems employ high-frequency or radio frequency sinusoidal signals called **carriers** to transport (or carry) information between endpoints.

The laws and regulations of the countries in which the systems are to be deployed govern and constrain the radiation of electromagnetic waves. Various frequency bands are allocated by law for specific applications; for example, there are AM, FM, and TV broadcast bands; public safety bands; airport communication, radar, traffic control, and maritime applications bands; and others. Furthermore, the laws may regulate transmitted power, transmitted spectrum and spectrum characteristics, modulation method, geographic location, tower height, and so on. Figure 1.2 shows some of the spectrum allocations in the ultra-high-frequency (UHF) band from 300 MHz to 3 GHz. A detailed chart of spectrum allocations in the United States is available from the National Telecommunications and Information Administration (NTIA).² In the United States, the Federal Communications Commission (FCC) is the agency entrusted with the responsibility for administering the use of the radio spectrum, granting licenses, and working with government and private industry to develop fair and equitable regulatory rules and standards.

Information signals are imposed upon a carrier signal by modulating (varying) its amplitude, frequency, and/or phase in direct relation to the variations of the information signal. At the receiving end, an information signal is extracted from the carrier by a process of demodulation. The boxes labeled “Modulation” and “Demodulation” refer to any of a wide range of techniques

2. National Telecommunications and Information Administration. Source: www.ntia.doc.gov/osm-home/allochrt.html, accessed August 8, 2006.

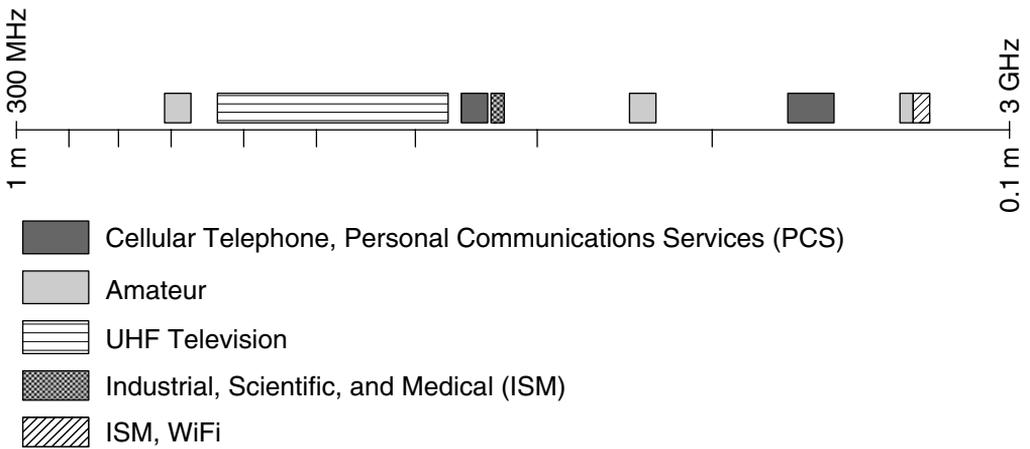


Figure 1.2 Some Spectrum Allocations in the UHF Band (January 2008)

that may be used to impose/extract an information signal upon/from a carrier. As we will discuss later, the choice of modulation scheme is strongly influenced by a number of factors, including available frequency spectrum, spectrum rules and regulations, required throughput, channel characteristics, and QoS requirements. In the context of a wireless system (or a “broadband” wired system that employs coaxial cable, waveguide, or fiber as a transmission medium), a modulator translates the spectrum of a baseband signal to a bandpass spectrum centered about some high “radio” frequency appropriate for the intended application and consistent with spectrum regulations.

Many wired systems (for example, “plain old telephone service” [POTS]) use transmission media that allow the system to operate effectively at baseband. For such systems, a modulator translates an information signal into waveforms (sometimes called line codes) that are optimized for the given transmission medium and application. For example, a line code may convert a binary bit stream (1s and 0s) into a bipolar or multilevel voltage waveform, or it may convert a bit stream to positive and negative voltage transitions.

For wireless systems, a transmitter is essentially an RF power amplifier and appropriate bandpass filter. A transmitter drives a transmitting antenna (often through a coaxial cable or waveguide) and ensures that the modulated RF signal is radiated at a power level, and within a bandwidth, specific to the application and applicable regulations. Wired systems, on the other hand, often use transmitters termed **line drivers** that ensure that transmitted signals have sufficient energy to overcome the line losses in the path to the receiving end.

The power intercepted and absorbed by a receiving antenna is usually much lower than the transmitted power. For example, when a cellular base station transmits with a power of one watt, the received signal two miles away may be only a few tenths of a nanowatt. In fact, a receiver may be located so far from the transmitter that the signal level is comparable to system noise. **System noise** is a random signal that arises from a number of sources such as galactic radiation,

engine ignitions, and the very devices used to amplify a received signal. In particular, we will discuss **thermal noise**, which is a random signal arising from the thermal agitation of electrons in the receiving antenna and its downstream interconnections and circuitry. The difference between transmitted and received power is inversely related to the distance (raised to some power) between the transmitting and receiving antennas and is termed **path loss**.

A receiver is essentially an amplifier designed to optimally reproduce the transmitted signal and remove the carrier. As such, a receiver is matched to the characteristics of the transmitted signal. Receivers usually employ high-gain, low-loss front-end amplifiers that are designed to minimize the level of thermal noise that they will pass to downstream functional blocks.

Signal processing on the receiving end seeks to restore the signal originating at the source. It converts the signal from the receiver into the form required for the endpoint recipient, that is, the Information Sink. In modern digital communication systems, signal processing at the receiving end is aimed at the reliable detection of bits. This may include error detection and correction, depending on the coding used to transmit the original signal, and also may include digital demodulation of a spread-spectrum signal.

Historical Perspective

A hundred years ago, a radio “system” was a transmitter, a receiver, and a path that could be successfully traversed by the miracle of radio waves. Even then there were broader issues to resolve—trade-offs that could be made between one element of the configuration and another. A more powerful transmitter or a more sensitive receiver; a higher mast or a directive antenna—these were some of the potential design improvements that could extend the range of the system when needed. Which of these to adopt became an important question, affecting cost and having performance implications in other dimensions. Was the power demand excessive? Was range being limited by circuit noise within the receiver or by external environmental noise? Was it limited by a physical obstruction over which one might radiate?

Radio had evolved from the design of general-purpose transmitters and receivers to a variety of “systems” with specific applications. Broadcast systems created the wildly popular phenomena of radio and television entertainment, by creating a way to deliver that entertainment inexpensively to a mass market. The trade-offs shifted again; base transmitters could be extremely powerful and expensive, sited on tall buildings or hills, using tall masts and elaborate gain antennas, but the millions of home receivers had to be low-cost consumer products.

“Propagation engineers” now had a more difficult problem; rather than designing a single path from one radio to another, they were concerned with an “area of coverage” in which signal quality was likely (but not guaranteed) to be acceptable. Moreover, the demand for channels required channels to be reused in nearby areas, so that interference needed to be predicted and controlled in the service areas of systems. Probability and statistics had joined the sciences that contributed to system design.

The first mobile telephone systems emerged in the 1940s, quickly became popular, and introduced a number of new trade-offs. The mobile equipment, carried in the trunks of cars and

powered from the car battery, needed to be smaller and lower in power (as well as cheaper) than the base station equipment; but coverage areas needed to be large, since cars would need to operate throughout large urban areas. A single high-powered base station could serve an entire urban area of more than a thousand square miles, but the lower-powered return paths from the vehicles could not, and satellite base station receivers became necessary. The higher cost of the (relatively few) satellite base stations could now be traded off for the (smaller) savings in power in the more numerous mobile units. This trade-off of expensive base equipment against more numerous mobile radios is characteristic of such systems.

In the major urban areas, a mobile telephone system would now consist of several radio channels, serving several hundred customers. This aggregation of radios and customers led to the incorporation of telephone traffic-handling probabilities into mobile system design—designers would now calculate the probability that an idle channel would be available. Because of the shortage of channels, however, service was very poor before the days of cellular systems. In the 1950s mobile operators who set up calls were replaced by equipment to automatically select idle channels, allowing the dialing of telephone calls in both directions. Signaling had been added to voice communication on radio channels, together with the first steps toward complex logic.

As early as the 1940s, when the first crude mobile telephone systems were going into service, AT&T had begun to propose a new concept in mobile radio system design. Rather than using a single high-powered base station to cover an entire urban area, they proposed to create a service area from a grid of smaller coverage areas, called “cells.” This had several important advantages. It allowed both base and mobile radios to operate at lower power, which would reduce radio costs. It also allowed larger service areas, since additional small coverage areas could always be added around the periphery to expand the system. Most importantly, although nearby cells required different channels to prevent interference, farther cells could reuse the same channels. In this way each channel could handle tens or even hundreds of calls in the same urban area, overcoming the limitations on capacity that were a result of spectrum shortages. These new systems would require a few hundred channels to get started, however, and the needs of the broadcasters were more persuasive in that period.

In 1968 the FCC finally opened the inquiry that ultimately led to cellular systems in the 1980s. For the advantages they provided, however, these systems demanded a new level of complexity. This time, the major complexity was not in the radio design, which saw few radical changes. With the introduction of small cells, calls could cross many cells, requiring mobile locating, channel switching during calls, and the simultaneous switching of wireline connections from one cell to another. Mobiles had to identify systems and find the channels on which calls could be received or originated, which required the introduction of microcomputers in mobile radios and made the technology of telephone switching machines an important element of radio system design. Moreover, with the introduction of so many disciplines in the design of a single system, and a variety of new trade-offs to be made, it was no longer practical for the many engineers to mediate these trade-offs, and the practice of systems engineering became a new and important discipline.

The introduction of cellular systems also marked the continuation of a long-term trend, in which spectrum shortages drove system designs to higher and higher frequencies. Frequencies such as 900 MHz (and later, 2 GHz) were used for such applications for the first time, and it became necessary to understand the propagation characteristics at these frequencies in real-world environments. Moreover, the old methods of the propagation engineer, in which terrain elevations were plotted to determine coverage, were no longer practical for hundreds of cells in a single system, and statistical coverage methods were developed to assure an acceptable quality of coverage. This trend has reversed once again more recently, as computers have allowed detailed terrain studies to be carried out for many cells.

Even as the first analog systems such as the Advanced Mobile Phone Service (AMPS) were being deployed in the early 1980s, efforts were under way to provide significant performance and capacity enhancements enabled by digital communications, advancements in digital signal-processing technology, and speech encoding. The Global System for Mobile Communications (GSM) was a cooperative effort of European countries to define an evolutionary system that provided increased capacity (or equivalently improved spectral efficiency), improved the quality of service, and allowed seamless roaming and coverage across the continent, and eventually around the world. The GSM standard was the first to encompass both the radio elements and the interconnection of serving areas to provide a holistic approach to ubiquitous service. As the first commercial digital cellular system, GSM demonstrated the power of digital signal processing in providing spectrally efficient, high-quality communications. GSM systems began deployment in the early 1990s.

By the mid-nineties, digital spread-spectrum systems were being introduced in North America under standard IS-95. Introduced by Qualcomm, Inc., a U.S.-based company, this system allows all cells to use the same frequency. Each channel is distinguished not by a distinct frequency or time slot but by a spreading code. The fundamental basis for this system is a technique called code-division multiple access (CDMA), a technique that has become the universal architecture for third-generation systems and beyond. CDMA systems have provided another technological leap in complexity, bringing additional enhancements to capacity, information bandwidth, quality of service, and variety of services that can be provided.

Each generation of wireless systems builds upon the technological advances of the prior generation. For each step in this evolution, the classical tools of the engineer remain, but they are honed and reshaped by each subsequent generation. The importance of system design and the role of systems engineering have grown substantially with each new technological generation. The continuing demand for new services and increased capacity, interacting with ongoing technological advancement, leads to new opportunities for system design, new problems to solve, and even the development of new engineering disciplines.

Systems Engineering and the Role of the Systems Engineer

Wireless communications, and communications in general, are specializations in the discipline of systems engineering. Our approach to the study of wireless communications from the perspective of a systems engineer is therefore a study in a specialized field of systems

engineering. It is fitting, then, that we begin our study by discussing systems engineering at a general level.

Some type of system supports nearly every aspect of our daily life. Systems help us to travel anywhere on the Earth (and beyond), create memos, solve complex problems, store and retrieve vast arrays of information, cook our food, heat and light our homes, entertain ourselves and our friends, and of course communicate with each other. There is no universally accepted standard definition of a “system,” but the purposes of this discussion are served by the working definition: A **system** is any collection of elements or subsystems that operate interdependently to perform some specified function or functions.

An automobile, an airplane, a personal computer, a home, a television or radio, an ordinary telephone, and a microwave oven are all common examples of systems. But at a lower level, an automobile engine or transmission, an airplane’s hydraulic system, a computer chip or microprocessor, a home air-conditioning or heating unit, or the video circuitry of a television or audio circuitry of a radio are also systems by definition. Depending on the context of discussion, a system may often be referred to as a subsystem, since it may perform only a few of the intended or auxiliary functions of the overall system of which it is a part. For example, an automobile is a system that conveys passengers and/or objects to arbitrary geographic locations. Its subsystems are the engine, transmission, braking system, steering system, chassis, dashboard, and so on, all of which are necessary for an automobile to perform the functions we have come to expect. Likewise, an engine is a collection of other subsystems such as the ignition system, fuel system, and emission control system. At some level the terms *system* and *subsystem* become less relevant. For example, a passive circuit may be considered a system, but considering resistors, capacitors, and inductors as subsystems has little relevance. In such instances we may choose to use the term *component* or *element*.

In the previous sections we introduced a simplified block diagram for a generic wireless system. Each block may be considered a subsystem of the overall system. Furthermore, each block performs some direct or auxiliary function needed to meet the general requirements of the system application. Regardless of the intended wireless application, the designs of the various blocks and their functions are founded on principles derived from distinct specialty areas. To identify a few of these specialty areas:

- Antennas and electromagnetic wave propagation
- Microwave circuit theory and techniques
- Signals, systems, and signal processing
- Noise and random processes
- Statistical nature of the environment and its effects on a propagating signal
- Communication theory
- Traffic theory
- Switching and networking theory

Depending on complexity and scale, the design and development of a system usually require knowledge and professional expertise in a number of distinctly different disciplines. For example,

the development of large-scale wireless systems, such as personal communication systems or advanced radar systems, requires the participation of specialists in such diverse disciplines as

- Antenna design
- RF propagation and radio environment modeling
- Microwave circuit design
- Transmitter design
- Low-noise amplifier (LNA) design
- Modulator/demodulator (modem) design
- Digital circuit/system design
- Signal processing
- Real-time, non-real-time, and embedded software development
- Power systems and power management
- Switching, networking, and transmission
- Mechanical structures and packaging
- Human factors engineering
- Manufacturing engineering
- Reliability and quality engineering
- And, last but not least, systems engineering

Successful development companies usually have processes (sequences of well-defined steps and procedures) and information systems that allow development teams to work and communicate effectively; track progress; manage schedule, budget, and other resources; control changes; and maintain and improve product quality. Highly successful companies also review their processes, constantly seeking ways to reduce development costs and schedule time while improving product quality, customer satisfaction, and cost competitiveness. In fact, process engineering and improvement is an important area of specialization. A strong and continuously improving development process is often vital to a company's ability to compete in a given market.

Development processes may vary among companies, but they all possess common phases of particular emphasis, for example,

- Product/system definition
- Design/development
- Integration and system test
- Manufacture
- Product life-cycle management

The specific activities in each phase may vary significantly, and many of the phases may, and often do, run concurrently.

One of the most important factors contributing to the successful development of a system is a complete, well-directed, and stable product definition. The product definition, sometimes called

“functional product requirements” (FPR), is usually developed by a marketing or market research organization in concert with members of the technical development community, especially systems engineering. In addition to specifying the required attributes of the system from a customer perspective, an FPR also defines all the information necessary to ensure a viable financial return for the investors, including cost to manufacture the product, time to market, development budget, projected manufacturing ramp-up and life-cycle volumes, key competitive attributes, and so forth.

The design and development phase of any system usually begins with a system design. It is one of the most important products of a systems-engineering effort. A system design consists of all the requirements, specifications, algorithms, and parameters that a development team uses to design and develop the hardware and software necessary to implement and manufacture a product in accordance with an agreed-upon product definition. System-level documentation may include

- System-level requirements—a high-level technical document that translates the needs expressed from a customer perspective into technical constraints on system functions, performance, testing, and manufacture
- System architecture—a specification that defines all of the parameters and subsystem functions necessary to ensure interoperability among subsystems and meet system requirements, including distribution of system-level functions among the subsystems, definition of subsystem interfaces, and specification of system-level controls
- Supporting analyses—appropriate documentation of all analyses, simulations, experimentation, trade-off studies, and so on, that support the choice of key technical parameters and predict and/or verify system-level performance

As it relates to a system design, the responsibilities of a systems engineer are to

- Translate customer-level functional requirements into technical specifications at a system level
- Develop a system architecture and determine specific parameters to ensure that the system will meet the desired level of functionality and performance within specified constraints
- Perform trade-off analyses among the system elements to ensure that the implementation requirements can be met within the specified constraints and technology limitations
- Develop and negotiate specific requirements for each of the subsystems based on analysis, modeling, experimentation, and simulation

These functions are the focus of this text and are the basis for many other functions that systems engineers perform. These other functions might include

- Interacting with potential customers
- Developing human-interface specifications

- Developing plans, methods, and criteria for system integration and verification
- Interfacing with government and legal entities
- Specifying deployment, maintenance, and operations procedures
- Competitive analysis
- Supporting regulatory and standards development

Depending on the complexity of the system being developed, a team of systems engineers, each of whom has a particular area of expertise, may be required to fully perform all of the systems-engineering functions of a development.

Problem Statement

This text develops the major systems aspects of personal communication systems while demonstrating the application of relevant theory and principles and introducing students to some of the real-world aspects of the wireless systems-engineering profession. It is fitting, therefore, that the subject matter be presented in the context of a solution to a general systems-engineering problem. To be specific, we seek to design a wireless telecommunication system that will

- Support the communication of information of various types, including speech, text, data, images, and video, in urban, suburban, and rural environments and with quality approximating that of wired communications
- Be capable of expanding in geographic coverage
- Allow for virtually limitless growth in the number of users
- Support endpoints that are not geographically fixed and, in fact, may be moving at vehicular speeds

Many of the attributes of this system, as stated previously, were in fact the major objectives underlying the development of the very first cellular mobile telephone systems. Our discussions of principles and concepts are presented as motivation for solving this systems-engineering problem in particular. In view of the continued advances in digital technologies and the directions of modern communication systems, our emphasis will be on digital wireless communications, although many of the principles apply to both analog and digital systems.

Since the advent of the first mobile phone systems, the meanings of some commonly used terms have become blurred by marketing and advertising efforts to provide some level of distinction between early first and later generations of systems. Specifically, the terms *cellular* and *PCS* are often used to identify the cellular frequency (850 MHz) or personal communication systems (or services) (1.9 GHz) frequency bands. The term *cellular*, however, originally referred to the technology underlying nearly all of the systems that may be classified as personal communication systems. We will endeavor to ensure that the meaning is always clear in context; however, it is important to recognize that most modern systems are capable of operating in either band.

Index

- 1×EV-DO (1× evolution for data only) Rev. 0. *See* DO (data only) standard.
 - 1×EV-DV (1× evolution for data and voice). *See* DV (data and voice) standard.
 - 1G (first generation), 399–400
 - 1-persistent CSMA, 330–331
 - 1×RTT (1× radio transmission technology), 421–426
 - 2G (second generation), 400–405
 - 2.5G (second generation)
 - CNIR (carrier-to-noise-and-interference ratio), 407
 - EDGE (Enhanced Data for Global Evolution), 410–411
 - GPRS (General Packet Radio Service), 408–410
 - HSCSD (High-Speed Circuit-Switched Data), 407–408
 - puncturing, 408
 - RACH (reverse access channel), 409
 - 2B1Q line code, 207
 - 3G (third generation)
 - overview, 405–407
 - OVSF (orthogonal variable spreading factor), 413
 - PPSDN (public packet-switched data network), 411–412
 - W-CDMA (Wideband Code-Division Multiple Access), 411–414
 - 3GPP (Third Generation Partnership Project), 406
 - 3GPP2 (Third Generation Partnership Project 2), 406
 - 8-ary phase-shift keying (8PSK), 279, 410
 - 8PSK (8-ary phase-shift keying), 279, 410
 - 16-QAM modulation, 279
 - 64-QAM modulation, 279
- A**
- A priori* probabilities, 209
 - Access channels, 291
 - Access network (AN), 427
 - Access terminal (AT), 427–431
 - ACK (acknowledgment), 417
 - Active neighbor list, 404
 - Active set, 404
 - Adaptive DPCM, 371
 - Additive white Gaussian noise (AWGN), 204
 - Adequate received signal level, 133
 - Adjacent-channel interference, 171–173, 296
 - Advanced Mobile Phone Service (AMPS), 12, 297
 - Air interface. *See* RF links.
 - A-law compression, 367
 - Aliasing, 235, 358
 - Allocating frequency bands. *See* Spectrum allocation.
 - Allocation, 64
 - All-zero path, 388
 - Aloha protocol
 - backoff procedure, 327
 - efficiency, estimating, 327–328
 - overview, 326
 - slotted Aloha, 328–330
 - AM broadcasting
 - adjacent-channel interference, 296
 - AMPS (Advanced Mobile Phone Service), 297
 - channel spacing, 298–299
 - clear channels, 296
 - cochannel interference, 296
 - duplexers, 300
 - efficiency, 298–299
 - frequency-division duplexing, 299–300
 - frequency-division multiplexing, 296–297
 - full-duplex, 299–300
 - grouping channels, 297
 - groups, 297
 - half-duplex, 299–300
 - jumbo groups, 297
 - mastergroups, 297
 - overview, 296
 - signal distance, 296
 - single full-duplex, 300
 - SIR (signal-to-interference ratio), 298–299
 - spectral shaping, 298–299
 - supergroups, 297
 - for telephone networks, 296–298

- Amplifiers
 - designing, 65–66
 - LNA (low-noise amplifier), 56–57
 - power spectrum, 49
 - source of thermal noise, 44–45
- AMPS (Advanced Mobile Phone Service), 12, 297
- AN (access network), 427
- Analog filters, 171
- Analog signals, converting to digital. *See* PCM (pulse code modulation).
- Angle-modulated signals, 254
- ANSI (American National Standards Institute), 401
- ANSI/TIA/EIA-136, 401
- Antennas
 - adaptable, 438–439
 - beamwidth
 - azimuth plane, 25
 - definition, 25
 - effective aperture, relation to, 26–27
 - elevation plane, 25
 - first null-to-null, 26
 - and gain, 26–27
 - half-power, 26
 - physical dimensions, 25–26
 - planes, 25
 - definition, 4
 - dipole, 24–25
 - directional, sectoring, 175–179
 - dish, 26
 - diversity gain, 439
 - effective aperture. *See also* Range equation.
 - beamwidth, relation to, 26–27
 - calculating, example, 27–28
 - gain, relation to, 27
 - power factors, 21–22
 - efficiency, and physical dimensions, 19
 - EIRP (effective isotropic radiated power), 29, 65–66. *See also* ERP (effective radiated power).
 - ERP (effective radiated power), 66. *See also* EIRP (effective isotropic radiated power).
 - gain. *See also* Range equation.
 - and beamwidth, 26–27
 - calculating, example, 28
 - definition, 26
 - effective aperture, relation to, 27
 - increasing power, 28
 - maximum range, example, 33–34
 - reciprocity, 28
 - ground reflections, 79–86
 - half-wave dipole. *See* Dipole.
 - height, propagation modeling, 79–86
 - isotropic, 20–22
 - maximum range, example, 33–34. *See also* Range equation.
 - optimizing systems, 66
 - path loss, 10. *See also* Range equation.
 - path-loss exponent, 32
 - power factors
 - beamwidth, 25–27
 - distance between receiver and transmitter, 21–22
 - effective aperture, 21–22
 - gain, 26–27
 - radiation patterns
 - azimuth plane, 25
 - bandwidth planes, 25
 - beamwidth, 25–27
 - dipole antennas, 24–25
 - elevation plane, 25
 - far-field radiation region, 22
 - Fraunhofer region, 22
 - main beam, 22–23
 - main lobe, 22–23
 - plot of, 24
 - power pattern, 22
 - side lobes, 22–23
 - range, calculating, 28–34
 - range equation, 28–34
 - receiver sensitivity, 30
 - receiving, 19
 - size, relation to efficiency, 8
 - spatially multiplexing, 439
 - system loss, 31
 - transmitting, 19
- Antialiasing filter, 358
- ARQ (automatic repeat request), 376–377
- AT (access terminal), 427–431
- Autocorrelation, 217–220
- Available gain, 47–49
- Average call duration, 189
- Average holding time, 189

Average power, 37–41

AWGN (additive white Gaussian noise), 204

Azimuth plane, 25

B

Backoff procedure, 327

Bandlimited sources, 6–7

Bandpass filter (BPF), 237

Bandwidth

carrier-based signaling

aliasing, 235

definition, 229

frequency-domain effect, 231

minimum, calculating, 231–233

Nyquist bandwidth, 233–235

Nyquist equivalent spectrum, 232–235

raised-cosine pulses, 234

rolloff parameter, 234

sampling theorems, 235

carrier-based signaling modulation,

229–235

definition, 229

frequency-domain effect, 231

minimum, calculating, 231

Nyquist bandwidth, 233–235

Nyquist equivalent spectrum,
232–235

sharing. *See* Multiple user channels.

Bandwidth planes, 25

Base station (BS), 153–155

Baseband signaling. *See also* Carrier-based
signaling; Spread-spectrum signaling.

2B1Q line code, 207

architecture, 204–207

autocorrelation, 217–220

BER (bit error rate), 208

block diagram, 205

convolution, 209, 219

correlation, 216–220

correlation receiver, 220–222

correlators, 216–220, 222

decision statistic, 208

filters, 208

lag, 216–220

line code, 205

Manchester code, 206

matched filters, 212–215, 222

NRZ (non-return-to-zero) line code,
205–206

optimum threshold value, 210

a priori probabilities, 209

probability of error, 208–211

probability of error, and received power,
223–226

pulse detection, 207–212

receiver performance, 222–226

RZ (return-to-zero) line code, 206

samplers, 208

SNR (signal-to-noise ratio), 223–226

symbol period, 205

threshold comparators, 208

waterfall curves, 223–226

Wiener-Khinchine theorem,
217–218

Baseband signals, 7

Beamwidth

and antenna physical dimensions,
25–26

azimuth plane, 25

definition, 25

effective aperture, relation to, 26–27

elevation plane, 25

first null-to-null, 26

and gain, 26–27

half-power, 26

planes, 25

BER (bit error rate), 61–62, 208, 351

BFSK (binary frequency-shift keying),
254–261

BLER (block error rate), 416

Blocked calls, 188, 453

Blocked calls cleared model, 190–191,
453

Blocked calls delayed model, 190–191,
453

Blocking probability, 460–461

Boundary coverage, 133

BPF (bandpass filter), 237

BPSK (binary phase-shift keying), 236–239

Brick wall filter, 171

BS (base station), 153–155

Burst error, 402

Burstiness, 351

Bursting vs. streaming, 354–355

Butterworth filter, 50

C

- Call arrival model, 454–455
 - Call response, 292–294
 - Calls
 - average duration, 189
 - average holding time, 189
 - blocked, 188, 453
 - blocked calls cleared model, 190–191, 453
 - blocked calls delayed model, 190–191, 453
 - initiating, 292–293
 - Carried load, 190
 - Carried traffic intensity, 190
 - Carrier frequency
 - path loss predictions, 101
 - propagation modeling. *See* Hata model.
 - Carrier-based signaling. *See also* Baseband signaling; Spread-spectrum signaling.
 - bandwidth
 - aliasing, 235
 - definition, 229
 - frequency-domain effect, 231
 - minimum, calculating, 231–233
 - Nyquist bandwidth, 233–235
 - Nyquist equivalent spectrum, 232–235
 - raised-cosine pulses, 234
 - rolloff parameter, 234
 - sampling theorems, 235
 - basic blocks, 227–228
 - block diagram, 228
 - channels, 227
 - modulation
 - 8PSK (8-ary phase-shift keying), 279
 - 16-QAM, 279
 - 64-QAM, 279
 - angle-modulated signals, 254
 - bandwidth, 229–235
 - BFSK (binary frequency-shift keying), 254–261
 - BPSK (binary phase-shift keying), 236–239
 - Carson's rule, 257
 - coherent systems, 238
 - continuous-phase FSK, 254–256
 - definition, 226
 - DPSK (differential binary phase-shift keying), 239–243
 - DQPSK (differential quadrature phase-shift keying), 289
 - frequency sensitivity, 255–256
 - FSK (frequency-shift keying), 254–261
 - Gaussian filters, 262–264
 - GFSK (Gaussian frequency-shift keying), 262–264
 - GMSK (Gaussian minimum-shift keying), 267
 - in-phase components, 238–239
 - instantaneous frequency, 254–255
 - keying, 229
 - linear, 229
 - modulated carrier architecture, 227–228
 - modulation index, 256–257
 - MSK (minimum-shift keying), 264–267
 - noncoherent systems, 238
 - nonlinear, 229
 - OQPSK (offset quadrature phase-shift keying), 251–254
 - orthogonal signals, 260–261
 - overview, 226–227
 - peak frequency deviation, 256–257
 - phase-locked receivers, 238
 - principles, 229–235
 - PSK (phase-shift keying), 229, 244
 - QAM (quadrature amplitude modulation), 279
 - QPSK (quadrature phase-shift keying), 243–251
 - quadrature components, 238–239
 - raised-cosine pulse, 237
 - root-raised-cosine pulse, 237
 - spectral efficiency, 237
 - receiver architecture, 227–228
 - recovering information, 227
 - transmitter architecture, 227–228
- Carriers, 8, 19
- Carrier-sense multiple access (CSMA), 330–335
- Carrier-sense multiple access with collision detection (CSMA/CD), 335
- Carrier-to-interference ratio (CIR), 407, 415–416
- Carrier-to-noise-and-interference ratio (CNIR), 407

- Carson's rule, 257
- CDM (code-division multiplexing), 415
- CDMA (code-division multiple access)
 - collisions, 308–311
 - DSSS (direct-sequence spread spectrum)
 - Hadamard matrices, 317
 - multiple users, 315–316
 - nearly orthogonal spreading codes. *See* PN (pseudonoise) spreading codes.
 - orthogonal spreading codes, 316–318
 - overview, 311–315
 - PN (pseudonoise) spreading codes, 318–325
 - SNIR (signal-to-noise-and-interference ratio), 320–322
 - Walsh functions, 317
 - FHSS (frequency-hopping spread spectrum), 307–311
 - handoffs, 186–187
 - history of, 12
 - hits, 308–311
 - maximum subscribers, 311, 323–234
 - overview, 306–307
 - reuse factor, 401
 - spread-spectrum modulation, 306–307
- cdma2000 system
 - history of cellular systems, 289
 - standards. *See* RTT (radio transmission technology).
- cdmaOne system, 289, 402–405
- CDVCC (coded digital verification color code), 303
- Cell layout
 - available channels, calculating, 163
 - cell splitting, 179–183
 - circular regions, 157
 - clusters of cells
 - definition, 163
 - minimum size, calculating, 165–166, 169
 - minimum size, limitations, 167
 - number of, determining, 165–166
 - reuse distance, 163–164
 - size, trade-offs, 173–175
 - contiguous cells. *See* Clusters.
 - hexagonal grid, 158–160
 - most efficient pattern, 158
 - reuse distance, 163–164
 - separation distance, calculating, 161–163
 - square grid, 158–160
 - triangular grid, 158–160
- Cells
 - clusters
 - definition, 163
 - minimum size, calculating, 165–166, 169
 - minimum size, limitations, 167
 - number of, determining, 165–166
 - reuse distance, 163–164
 - size, trade-offs, 173–175
 - contiguous. *See* Clusters.
 - definition, 153
 - radius
 - reducing, 181–183
 - trade-offs, 173–175
 - splitting, 179–183
- Cellular concept, history of, 11–12
- Cellular digital packet data, 335
- Central office, 187
- CEPT (Conference of European Postal and Telecommunications Administrations), 400
- CFR (Code of Federal Regulations), 150
- Channel quality indicator (CQI), 416
- Channel sets, 155–156
- Channels
 - access methods
 - access channels, 291
 - call initiation, 292–293
 - call response, 292–294
 - code division. *See* CDMA (code-division multiple access).
 - control channels, 291
 - frequency division. *See* FDMA (frequency-division multiple access).
 - overview, 290–294
 - paging channels, 291
 - reverse control channels, 291
 - sync channels, 291
 - time division. *See* TDMA (time-division multiple access).
 - available
 - calculating, 152, 163
 - and number of subscribers, 152–153
 - carrier-based signaling, 227
 - cellular system, diagram, 291

Channels (*Continued*)

- definition, 4, 19, 291
 - dividing by
 - code. *See* CDMA (code-division multiple access).
 - frequency. *See* FDMA (frequency-division multiple access).
 - time. *See* TDMA (time-division multiple access).
 - dynamic assignment, 185
 - grouping, 297
 - jumbo groups, 297
 - mastergroups, 297
 - multiple user access. *See* Multiple user channels.
 - organizing into groups. *See* Channel sets.
 - partitioning, 173
 - selection, history of, 11
 - spacing, AM broadcasting, 298–299
 - supergroups, 297
- Checksums, 376
- Chips, spread-spectrum signaling, 271
- CIR (carrier-to-interference ratio), 407, 415–416
- Circular cell regions, 157
- Clear channels, 296
- Clusters of cells
 - definition, 163
 - minimum size, calculating, 165–166, 169
 - minimum size, limitations, 167
 - number of, determining, 165–166
 - reuse distance, 163–164
 - size, trade-offs, 173–175
- CNIR (carrier-to-noise-and-interference ratio), 407
- Cochannel interference
 - AM broadcasting, 296
 - cluster size, effect on, 167
 - definition, 153
 - predicting, 167–171
- Code of Federal Regulations (CFR), 150
- Codecs, 366
- Coded digital verification color code (CDVCC), 303
- Code-division multiple access (CDMA). *See* CDMA (code-division multiple access).
- Code-division multiplexing (CDM), 415
- Coding for error correction

- ARQ (automatic repeat request), 376–377
- checksums, 376
- convolutional codes. *See also* Forward error correction.
 - all-zero path, 388
 - constraint length, 378
 - decoding, 380–383
 - definition, 377
 - encoding, 378–379
 - Hamming distance, 381, 388
 - maximum likelihood rule, 382–383
 - minimum free distance, 388
 - path metrics, 382
 - performance, 387–389
 - trellis diagrams, 379–380
 - Viterbi algorithm, 383–387
- forward error correction, 376–377. *See also* Convolutional codes.
 - parity check, 376
 - triple redundancy, 377
- Coding scheme (CS), 409
- Coherence bandwidth, 101, 115–120
- Coherence time, 101, 121
- Coherent systems, 238
- Collision probability
 - calculating, 328–330
 - reducing. *See* CSMA (carrier-sense multiple access).
- Collisions, CDMA, 308–311
- Companders, 366
- Components, 13
- Compression
 - A-law, 367
 - codecs, 368
 - companders, 368
 - compression/expansion, 364–366
 - compressors, 364
 - expanders, 364
 - images, 350
 - μ -law, 367
 - quantization, 364–366
- Compressors, 364
- Conference of European Postal and Telecommunications Administrations (CEPT), 400
- Connection layers, 398

- Constraint length, 378
 - Contention-based methods
 - 1-persistent CSMA, 330–331
 - Aloha protocol, 326–328
 - backoff procedure, 327
 - collision probability, calculating, 328–330
 - CSMA (carrier-sense multiple access), 330–335
 - nonpersistent CSMA, 330–331
 - overview, 325–326
 - packets, 326
 - packet-switching, 326
 - p -persistent CSMA, 331
 - PRMA (packet-reservation multiple access), 331
 - random numbers, 327
 - slotted Aloha, 328–330
 - streaming vs. bursting, 325–326
 - Contiguous cells. *See* Clusters.
 - Continuous-phase FSK, 254–256
 - Control channels, 291
 - Convolution, 209, 219
 - Convolutional codes
 - all-zero path, 388
 - constraint length, 378
 - decoding, 380–383
 - definition, 377
 - encoding, 378–379
 - Hamming distance, 381, 388
 - maximum likelihood rule, 382–383
 - minimum free distance, 388
 - path metrics, 382
 - performance, 387–389
 - trellis diagrams, 379–380
 - Viterbi algorithm, 383–387
 - Correction for
 - antenna height, 92–93
 - errors. *See* Coding for error correction.
 - terrain, 93–95
 - Correlation, 216–220
 - Correlation receiver, 220–222
 - Correlators, 216–220, 222
 - Coverage area
 - adequate received signal level, 133
 - boundary coverage, 133
 - calculating, 134–137
 - definition, 133
 - designing, 173–175
 - separation distance (geographic), 156
 - CQI (channel quality indicator), 416
 - CRC (cyclic redundancy check), 402
 - CS (coding scheme), 409
 - CSMA (carrier-sense multiple access), 330–335
 - CSMA/CD (carrier-sense multiple access with collision detection), 335
 - Cumulative probability distribution function, 107–108
- ## D
- D-AMPS (Digital Advanced Mobile Phone Service), 401
 - Data
 - BER (bit error rate), 351
 - burstiness, 351
 - delays, 352
 - QoS (quality of service), 353–354
 - source characteristics, 351
 - subscriber requirements, 351–352
 - throughput, 351
 - Data and voice (DV) standard, 425–426
 - Data only (DO) standard
 - Rev. 0, 425–432
 - Rev. A, 441
 - Data rate (DR), 414
 - Data rate control (DRC), 427–432
 - Data transmission
 - BER (bit error rate), 351
 - burstiness, 351
 - delays, 352
 - source characteristics, 351
 - subscriber requirements, 351–352
 - throughput, 351
 - Datagrams, 354
 - Data-sense multiple access, 335
 - dBm (dB relative to 1 mW), 31–33
 - dBW (dB relative to 1 W), 31
 - DCCH (dedicated control channel), 422–423
 - Decision levels, 359–361
 - Decision statistic, 208
 - Delay budget, speech sources, 347
 - Delay jitter, 347, 350–351

Delays

- data transmission, 352
- speech sources, 347–348
- video conferencing, 350–351

Delta modulation, 369–371

Demodulation, 7–9. *See also* Modulation.

Designing systems

- cell radius
 - reducing, 181–183
 - trade-offs, 173–175
- cell splitting, 179–183
- cluster size, 173–175
- directional antennas, 175–179
- dynamic channel assignment, 185
- FDM (frequency-division multiplexing), 151
- FDMA (frequency-division multiple access), 151
- frequency band allocation. *See* Spectrum allocation.

geographic coverage, 173–175

GOS (grade of service), 187–194

handoffs

- CDMA (code-division multiple access), 186–187
- mobile assisted, 186
- overview, 185–187
- process description, 186–187
- purpose of, 185

MSC (mobile switching center), 184

MTSO (mobile telephone switching office), 184

PSTN (public switched telephone network), 184 for QoS (quality of service). *See* Optimizing systems.

requirements assessment, 150–153

sectoring, 175–179, 193–194

subscriber density, 173–175

system architecture, 150–153

trade-offs, 173–175

traffic engineering, 187–194

trunking, 187–194

Development processes, 14–15

DFT (discrete Fourier transform), 428

Differential binary phase-shift keying (DPSK), 239–243

Differential PCM (DPCM). *See* DPCM (differential PCM).

Differential quadrature phase-shift keying (DQPSK), 289

Digital Advanced Mobile Phone Service (D-AMPS), 401

Digital signal processing (DSP), 8

Digital signaling. *See* Baseband signaling; Carrier-based signaling; Spread-spectrum signaling.Digital signals, converting from analog. *See* PCM (pulse code modulation).

Digital traffic channel (DTC), 303

Digitizing speech. *See also* PCM (pulse code modulation).

formants, 371

LPC (linear predictive coder), 373–376

model of human voice, 371–373

overview, 355–356

source coding. *See* LPC (linear predictive coder); Vocoders.

vocoders, 371–376

VSELPC (vector-sum excited linear predictive coder), 375

waveform coding. *See* PCM (pulse code modulation).

Dipole antennas, 24–25

Directional antennas, 175–179

Direct-sequence spread spectrum (DSSS). *See* DSSS (direct-sequence spread spectrum).

Dish antennas, 26

Distortion, aliasing, 235, 358

Diversity gain, 404

DO (data only) standard

Rev. 0, 425–432

Rev. A, 441

Documentation, system-level, 15

Doppler spread, 121–123

Downlink, 66–70

DPCM (differential PCM)

adaptive, 371

delta modulation, 369–371

performance, 371

sampling, 367–369

slope overload noise, 370

vs. LPC (linear predictive coder), 374

DPSK (differential binary phase-shift keying), 239–243

DQPSK (differential quadrature phase-shift keying), 289

DR (data rate), 414

DRC (data rate control), 427–432
 DSP (digital signal processing), 8
 DSSS (direct-sequence spread spectrum)
 Hadamard matrices, 317
 multiple users, 315–316
 narrowband interference, 275–278
 orthogonal spreading codes, 316–318
 overview, 311–315
 PN (pseudonoise) spreading codes,
 318–325
 spread-spectrum signaling, 271–278
 Walsh functions, 317
 DTC (digital traffic channel), 303
 DTMF (dual-tone multiple frequency),
 303
 Duplexers, 300
 DV (data and voice) standard, 425–426
 Dynamic channel assignment, 185
 Dynamic range, 347, 364
 speech sources, 347

E

ECSD (Enhanced Circuit Switched Data), 410
 EDGE (Enhanced Data for Global Evolution), 410–
 411
 Effective aperture, antennas
 beamwidth, relation to, 26–27
 calculating, example, 27–28
 gain, relation to, 27
 power factors, 21–22
 Effective input-noise temperature
 calculating, example, 58–61
 calculating output-noise power spectrum, 57
 definition, 51
 vs. noise figure, 54–55
 EGPRS (Enhanced General Packet Radio Service),
 410
 8-ary phase-shift keying (8PSK), 279, 410
 8PSK (8-ary phase-shift keying), 279, 410
 EIRP (effective isotropic radiated power),
 29, 65–66
 Elements, 13
 Elevation plane, 25
 Empirical models, 86–95
 End users. *See* Subscribers.
 Endpoints, 6
 Engineering systems. *See* Designing systems.

Environmental factors, common characteristics, 5
 Equalization, 118
 Erlang, A. K., 189, 461
 Erlang B formula, 460–465
 Erlang B table, 465–475
 Erlang formula, 189
 erlangs, 189, 461
 ERP (effective radiated power), 66
 Error correction. *See* Coding for error correction.
 Error function, 98
 ETACS (European Total Access Communications
 System), 399
 ETSI (European Telecommunications Standards
 Institute), 400
 Expanders, 364
 Exponential probability distribution, 112

F

FACCH (fast associated control channel),
 303
 Fade margin, 100
 Fading
 link budget, 137–139
 propagation modeling
 coherence bandwidth, 101, 115–120
 coherence time, 101
 equalization, 118
 fast, 127–128, 131–132
 flat, 104, 118
 frequency changes, 104
 frequency-selective, 104, 118
 large-scale, 100
 log-normal, 100
 macro-scale, 100
 macroscopic, 100
 micro-scale, 100–106
 microscopic, 100
 multipath propagation, 100
 Rayleigh fading, 101
 RMS (root mean square) delay spread, 101,
 118–120
 slow, 127–128, 131–132
 small-scale, 100
 two-ray model, stationary receiver,
 102–106
 Far-field radiation region, 22

- Fast fading, 127–128, 131–132
- Fast frequency hoppers, 269
- FCC (Federal Communications Commission)
communications regulations, 150
creation date, 150
definition, 8
history of cellular systems, 11
spectrum allocation, 179
Web site, 296
- FCH (fundamental channel), 421
- FDD (frequency-division duplex), 299–300, 400
- FDM (frequency-division multiplexing), 151, 296–297
- FDMA (frequency-division multiple access), 151, 295
- FEC (forward error correction), 402, 407–409
- FFT (fast Fourier transform), 438
- FHSS (frequency-hopping spread spectrum), 268–270, 307–311
- Filters
analog, 171
antialiasing, 358
baseband pulse detection, 208
baseband signaling, 208
BPF (bandpass filter), 237
brick wall, 171
Butterworth, 50
Gaussian, 262–264
interference, 171–173
LPF (lowpass filter), 237
matched, 212–215, 222
selective bandpass filter, 171
- Fingers, 404
- First generation (1G), 399–400
- First null-to-null, 26
- Flat fading, 104, 118
- Flicker, video, 350
- FM (frequency modulation), 348
- Formants, 371
- Forward error correction, 376–377
- Forward error correction (FEC), 402, 407–409
- Forward link, 417, 421
- FPLMTS (Future Public Land Mobile Telecommunications System), 405
- FPR (functional product requirements), 15
- Frame preamble, 301
- Frames, TDMA, 301
- Fraunhofer region, 22
- Free-space loss. *See* Path loss.
- Frequency
fading, 104
modulation, 255–256
relation to wavelength, 8
reuse ratio
cluster size, 174–175
definition, 155
SIR (signal-to-interference ratio), 169
sensitivity, 255–256
- Frequency bands
allocating. *See* Spectrum allocation.
laws and regulations, 150
- Frequency modulation (FM), 348
- Frequency-division duplex (FDD), 299–300, 400
- Frequency-division multiple access (FDMA), 151, 295
- Frequency-division multiplexing (FDM), 151, 296–297
- Frequency-hopping spread spectrum (FHSS), 268–270, 307–311
- Frequency-selective fading, 104, 118
- FSK (frequency-shift keying), 254–261
- Full-duplex, 299–300
- Full-scale range quantizer, 361
- Function tables, 446–451
- Functional product requirements (FPR), 15
- Fundamental channel (FCH), 421
- Future Public Land Mobile Telecommunications System (FPLMTS), 405
- ## G
- Gain, antennas
and beamwidth, 26–27
calculating, example, 28
definition, 26
effective aperture, relation to, 27
increasing power, 28
maximum range, example, 33–34
reciprocity, 28
- Gaussian filters, 262–264
- Gaussian frequency-shift keying (GFSK), 262–264
- Gaussian minimum-shift keying (GMSK), 267

- General Packet Radio Service (GPRS), 408–410
- Generational descriptions. *See also* History of cellular systems.
- 1G (first generation), 399–400
 - 2G (second generation), 400–405
 - 2.5G (second generation)
 - CNIR (carrier-to-noise-and-interference ratio), 407
 - EDGE (Enhanced Data for Global Evolution), 410–411
 - GPRS (General Packet Radio Service), 408–410
 - HSCSD (High-Speed Circuit-Switched Data), 407–408
 - puncturing, 408
 - RACH (reverse access channel), 409
 - 3G (third generation). *See also* HSPA (High-Speed Packet Access).
 - overview, 405–407
 - OVSF (orthogonal variable spreading factor), 413
 - PPSDN (public packet-switched data network), 411–412
 - W-CDMA (Wideband Code-Division Multiple Access), 411–414
 - 3GPP (Third Generation Partnership Project), 406
 - 3GPP2 (Third Generation Partnership Project 2), 406
 - 4G (fourth generation). *See* OFDM (orthogonal frequency-division multiplexing).
- Geographic coverage. *See* Coverage area.
- Geographic location of subscribers, 156
- GFSK (Gaussian frequency-shift keying), 262–264
- GMSK (Gaussian minimum-shift keying), 267
- GMSK modulation, 289–290
- Gold codes, 413
- GOS (grade of service). *See also* QoS (quality of service).
 - average call duration, 189
 - average holding time, 189
 - blocked calls, 188
 - blocked calls cleared model, 190–191
 - blocked calls delayed model, 190–191
 - carried load, 190
 - carried traffic intensity, 190
 - central office, 187
 - definition, 188–189
 - offered load, 189
 - offered traffic intensity, 189
 - Poisson model, 190
 - sectoring, 193–194
 - subscriber calling habits, 189
 - throughput, 190
 - traffic engineering, 453–454
 - trunking, 187–194
 - trunking efficiency, 192–194
 - trunking theory, 188
 - trunks, 188
- GPRS (General Packet Radio Service), 408–410
- Ground reflections, 79–86
- Groups
 - AM broadcasting channels, 297
 - cells. *See* Clusters.
 - channel sets, 155–156
 - jumbo groups, 297
 - mastergroups, 297
 - supergroups, 297
- GSM (Global System for Mobile Communications)
 - history of, 12, 289–290
 - overview, 304–305
- GSM (Groupe Spéciale Mobile), 400
- Guard interval, 301–302
- ## H
- Hadamard matrices, 317
- Half-duplex, 299–300, 306
- Half-power beamwidth, 26
- Half-wave dipole antenna. *See* Dipole antennas.
- Hamming distance, 381, 388
- Handoffs
 - CDMA (code-division multiple access), 186–187
 - definition, 153
 - hard, 404
 - mobile assisted, 186
 - overview, 185–187
 - process description, 186–187
 - purpose of, 185
 - soft, 404

- Handovers. *See* Handoffs.
- Hard handoffs, 404
- H-ARQ (hybrid automatic repeat request), 417, 430
- Hata model
 link budget, 137–139
 path loss predictions, 87–90, 95, 98–100
- HDR (high data rate), 425
- Hertz, Heinrich, 226
- Hexagonal grid, 158–160
- Hidden stations, 335
- High-Speed Circuit-Switched Data (HSCSD), 407–408
- High-Speed Downlink Packet Access (HSDPA), 414
- High-Speed Packet Access (HSPA). *See* HSPA (High-Speed Packet Access).
- High-Speed Uplink Packet Access (HSUPA), 414, 418–419
- History of cellular systems. *See also* Generational descriptions.
 access methods, 289–290
 AMPS (Advanced Mobile Phone Service), 12
 automatic channel selection, 11
 CDMA (code-division multiple access), 12
 cdma2000 system, 289
 cdmaOne system, 289, 402–405
 cellular concept, 11–12
 CEPT (Conference of European Postal and Telecommunications Administrations), 400
 D-AMPS (Digital Advanced Mobile Phone Service), 401
 ETACS (European Total Access Communications System), 399
 ETSI (European Telecommunications Standards Institute), 400
 evolution of radio, 10
 FDD (frequency-division duplex), 400
 GMSK modulation, 289–290
 GSM (Global System for Mobile Communications), 12, 289–290
 GSM (Groupe Spéciale Mobile), 400
 IMTS (Improved Mobile Telephone Service), 152
 IS-95, 289
 mobile telephones, 10–11
 Morse code, 226
 multiple user channels, 289–290
 NA-TDMA (North American Time-Division Multiple Access), 401
 QPSK modulation, 289–290
 Qualcomm, Inc., 12, 289–290, 401
 radio, 226
 roaming automation, 400
 spectrum shortages, 12
 spread-spectrum techniques, 12, 401
 telegraphy, 226
 UMTS (Universal Mobile Telecommunications System), 289
 USDC (U.S. Digital Cellular) system, 289–290
 W-CDMA (Wideband Code-Division Multiple Access), 289
- Hits. *See* Collisions.
- HLR (home location register), 441
- Hold time model, 456
- Hopping away from interference, 270
- HSCSD (High-Speed Circuit-Switched Data), 407–408
- HSDPA (High-Speed Downlink Packet Access), 414
- HSPA (High-Speed Packet Access). *See also* RTT (radio transmission technology).
 BLER (block error rate), 416
 CQI (channel quality indicator), 416
 forward link, 417
 H-ARQ (hybrid automatic repeat request), 417
 HSDPA (High-Speed Downlink Packet Access), 414
 HSUPA (High-Speed Uplink Packet Access), 414, 418–419
 PER (packet error rate), 416
 protocol enhancements, 415
 RoTT (rise-over-thermal threshold), 418
 scheduler, 417
 UEs (user elements), 416
- HSUPA (High-Speed Uplink Packet Access), 414, 418–419
- Human voice, model of, 371–373
- Hybrid automatic repeat request (H-ARQ), 417, 430

- I**
- IDFT (inverse discrete Fourier transform), 428
 - IF (intermediate frequency), 56
 - IFFT (inverse fast Fourier transform), 438
 - Images
 - QoS (quality of service), 353
 - source characteristics, 349
 - subscriber requirements, 349
 - IMT-2000 (International Mobile Telecommunications 2000), 405
 - IMTS (Improved Mobile Telephone Service), 152
 - Incremental redundancy (IR), 410
 - Information sinks. *See* Sinks.
 - Information sources. *See* Sources of information.
 - In-phase components, 238–239
 - Input-noise temperature. *See* Effective input-noise temperature.
 - Instantaneous frequency, 254–255
 - Integrated Services Digital Network (ISDN), 207, 355
 - Interference. *See also* Noise.
 - adjacent-channel, 295–296
 - AM broadcasting, 296, 298–299
 - FDMA (frequency-division multiple access), 295
 - hopping away from, 270
 - spreading. *See* Spread-spectrum signaling.
 - Interference prediction
 - adjacent-channel interference, 171–173
 - analog filters, 171
 - brick wall filter, 171
 - channel partitioning, 173
 - channel sets, 155–156
 - cochannel interference, 167–171
 - customer density management, 156
 - filters, 171–173
 - frequency reuse ratio
 - cluster size, 174–175
 - definition, 155
 - SIR (signal-to-interference ratio), 169
 - geographic location of subscribers, 156
 - interference-limited systems, 154
 - noise-limited systems, 154
 - power control, 173
 - selective bandpass filter, 171
 - separation distance (geographic), 156
 - sharp cutoff filters, 171
 - SIR (signal-to-interference ratio), 155, 169
 - SNIR (signal-to-noise-and-interference ratio), 154
 - Interference reduction factor. *See* Frequency, reuse ratio.
 - Interference-limited systems, 153–154
 - Interlaced scanning, 350
 - Interleaved scanning, 350
 - Intermediate frequency (IF), 56
 - Inverse discrete Fourier transform (IDFT), 428
 - Inverse fast Fourier transform (IFFT), 438
 - IR (incremental redundancy), 410
 - IS (interim standard), 400
 - IS-95 standard, 12, 289
 - IS-95A standard, 401
 - IS-95B standard, 401
 - ISDN (Integrated Services Digital Network), 207, 355
 - ISI (intersymbol interference), 433
 - Isotropic antennas, 20–22
 - Isotropic radiation, 20–22
 - ITU (International Telecommunication Union), 405
- J**
- Johnson, J. B., 38
 - Johnson noise, 38–39
 - Joint probability density function, 107
 - Jumbo groups, 297
- K**
- Keying
- 8PSK (8-ary phase-shift keying), 279
 - BFSK (binary frequency-shift keying), 254–261
 - BPSK (binary phase-shift keying), 236–239
 - definition, 229
 - DPSK (differential binary phase-shift keying), 239–243
 - DQPSK (differential quadrature phase-shift keying), 289
 - FSK (frequency-shift keying), 254–261
 - GFSK (Gaussian frequency-shift keying), 262–264
 - GMSK (Gaussian minimum-shift keying), 267
 - MSK (minimum-shift keying), 264–267
 - OQPSK (offset quadrature phase-shift keying), 251–254

Keying (*Continued*)

- PSK (phase-shift keying), 229, 244
- QPSK (quadrature phase-shift keying), 243–251

Kirchhoff's laws, 19

L

Lag, 216–220

Large-scale fading, 100

Laws and regulations, 8, 150. *See also* Standards.

Layers, 397–398

Lee model, 90–95

LEO (low Earth orbit), 405

Line codes, 205

Line drivers, 9

Linear modulation, 229

Linear predictive coder (LPC). *See* LPC (linear predictive coder).

Link budget

- fading, 137–139
- Hata model, 137–139
- path loss, 137–139
- radio links, 66–70

Links. *See* RF links.

LNA (low-noise amplifier), 56–57

Log-normal fading, 100

Log-normal shadowing, 95–100

Lossy transmission lines, 57–58

LPC (linear predictive coder)

- output of, 374
- overview, 373–374
- vs. DPCM (differential PCM), 374
- VSELPC (vector-sum excited linear predictive coder), 375

LPF (lowpass filter), 237

LTE (long-term evolution), 440

Lumped-element analysis, 19

M

MAC (medium access control), 397–398

MacDonald, V. H., 159

MAC-ID, 427–432

Macro diversity, 404

Macro-scale fading, 100

Macroscopic fading, 100

Main beam, 22–23

Main lobe, 22–23

Manchester code, 206

Marconi, Guglielmo, 226

Mastergroups, 297

Matched filters, 212–215, 222

Maximum likelihood rule, 382–383

Maxwell's equations, 18–19

MCS (modulation and coding scheme), 410

Mean-square quantization noise, 363

Median signal attenuation, calculating, 87

Micro-scale fading, 100–106

Microscopic fading, 100

Midriser quantizer, 360–361

Midtread quantizer, 360–361

MIMO (multiple input multiple output), 438

Minimum free distance, 388

Minimum-shift keying (MSK), 264–267

μ -law compression, 367

Mobile switching center (MSC), 184

Mobile telephone switching office (MTSO), 184

Mobile telephones, history of, 10–11

Mobile unit (MU), 196

Mobile-assisted handoffs, 186

Modulated carrier architecture, 227–228

Modulation. *See also* Demodulation.

- in block diagrams, 7–9
- carrier-based signaling
 - 8PSK, 279
 - 16-QAM, 279
 - 64-QAM, 279
- angle-modulated signals, 254
- bandwidth, 229–235
- BFSK (binary frequency-shift keying), 254–261
- BPSK (binary phase-shift keying), 236–239
- Carson's rule, 257
- coherent systems, 238
- continuous-phase FSK, 254–256
- definition, 226
- DPSK (differential binary phase-shift keying), 239–243
- frequency sensitivity, 255–256
- FSK (frequency-shift keying), 254–261
- Gaussian filters, 262–264
- GFSK (Gaussian frequency-shift keying), 262–264
- GMSK (Gaussian minimum-shift keying), 267

- in-phase components, 238–239
- instantaneous frequency, 254–255
- keying, 229
- linear, 229
- modulated carrier architecture, 227–228
- modulation index, 256–257
- MSK (minimum-shift keying), 264–267
- noncoherent systems, 238
- nonlinear, 229
- OQPSK (offset quadrature phase-shift keying), 251–254
- orthogonal signals, 260–261
- overview, 226–227
- peak frequency deviation, 256–257
- phase-locked receivers, 238
- principles, 229–235
- PSK (phase-shift keying), 229, 244
- QAM (quadrature amplitude modulation), 279
- QPSK (quadrature phase-shift keying), 243–251
- quadrature components, 238–239
- raised-cosine pulse, 237
- root-raised-cosine pulse, 237
- signal constellation, 238–239
- spectral efficiency, 237
- converting analog to digital. *See* PCM (pulse code modulation).
- DQPSK (differential quadrature phase-shift keying), 289
- Modulation and coding scheme (MCS), 410
- Modulation index, 256–257
- Modulator, 9
- Morse, Samuel B., 226
- Morse code, 226
- MSC (mobile switching center), 184
- MSK (minimum-shift keying), 264–267
- MTSO (mobile telephone switching office), 184
- MU (mobile unit), 196
- Multipath propagation
 - fading, 100–106
 - propagation modeling, 100–102
 - statistical models
 - coherence bandwidth, 115–120
 - cumulative probability distribution function, 107–108
 - exponential probability distribution, 112
 - joint probability density function, 107
 - probability density function, 108
 - probability distribution function, 108
 - Rayleigh density function, 109–113
 - Rayleigh fading, 106–113
 - region of integration, 109
 - Ricean probability distribution, 113–114
- Multiple input multiple output (MIMO), 438
- Multiple user channels. *See also* Subscriber density.
 - AM band. *See* AM broadcasting.
 - cellular digital packet data, 335
 - code division. *See* CSMA (carrier-sense multiple access).
 - contention-based methods
 - 1-persistent CSMA, 330–331
 - Aloha protocol, 326–328
 - backoff procedure, 327
 - collision probability, calculating, 328–330
 - collision probability, reducing. *See* CSMA (carrier-sense multiple access).
 - CSMA (carrier-sense multiple access), 330–335
 - nonpersistent CSMA, 330–331
 - overview, 325–326
 - packets, 326
 - packet-switching, 326
 - p*-persistent CSMA, 331
 - PRMA (packet-reservation multiple access), 331
 - random numbers, 327
 - slotted Aloha, 328–330
 - streaming vs. bursting, 325–326
- CSMA/CD (carrier-sense multiple access with collision detection), 335
- data-sense multiple access, 335
- frequency division. *See* FDMA (frequency-division multiple access).
- hidden stations, 335
- history of, 289–290
- multiplexing vs. multiple-access, 288
- spread-spectrum-based code-division. *See* CDMA (code-division multiple access).
- throughput, calculating, 334–335
- time division. *See* TDMA (time-division multiple access).

Multiplexing vs. multiple-access, 288

Music

- QoS (quality of service), 353
- source characteristics, 348
- subscriber requirements, 348–349

N

NACK (negative acknowledgment), 410

Narrowband interference

- DSSS (direct-sequence spread spectrum), 275–278
- FHSS (frequency-hopping spread spectrum), 269–270

NA-TDMA (North American Time-Division Multiple Access), 401

Noise. *See also* Interference.

- bandwidth, 49–50
- definition, 34
- floor, 35
- relation to signal. *See* SNR (signal-to-noise ratio).
- system, 9
- temperature, 45–46
- from thermal motion of electrons. *See* Thermal noise.

Noise factor. *See* Noise figure.

Noise figure

- calculating, example, 58–61
- overview, 50–54
- vs. effective input-noise temperature, 54–55

Noise-limited systems, 152, 154

Noncoherent systems, 238

Nonlinear modulation, 229

Nonlinear quantization, 364–367

Nonpersistent CSMA, 330–331

Nonuniform quantization, 364

Normal distribution, 443–446

Normalized power. *See* Average power.

NRZ (non-return-to-zero) line code, 205–206

NTIA (National Telecommunications and Information Administration), 8

NTSC (National Television System Committee), 349

Null-to-null frequency interval, 105–106

Null-to-null time interval, 127

Nyquist bandwidth, 233–235

Nyquist equivalent spectrum, 232–235

O

OFDM (orthogonal frequency-division multiplexing)

- 4G standards, 441–442
- 4G system proposals, 440–441
- adaptable antennas, 438–439
- antenna systems, 438–439
- definition, 437
- diversity gain antennas, 439
- increasing data rates, 433–437
- MIMO (multiple input multiple output), 438
- OFDMA (orthogonal frequency-division multiple access), 437
- overview, 432–433
- spatially multiplexing antennas, 439
- trade-offs, 437–438

OFDMA (orthogonal frequency-division multiple access), 437

Offered load, 189, 460–461

Offered traffic intensity, 189

Offset quadrature phase-shift keying (OQPSK), 251–254

Okumura model, 87

1 × EV-DO (1 × evolution for data only) Rev. 0. *See* DO (data only) standard.

1 × EV-DV (1 × evolution for data and voice). *See* DV (data and voice) standard.

1G (first generation), 399–400

1-persistent CSMA, 330–331

1 × RTT (1 × radio transmission technology), 421–426

Operating frequency, specifying, 64

Optimizing systems

- allocation, 64
- amplifier design, 65–66
- antennas, 66
- BER (bit error rate), 61–62
- design considerations, 64–66
- link budget, example, 66–70
- operating frequency, specifying, 64
- QoS (quality of service), subscriber perceptions, 61–62
- range equation, 63–66
- receiver sensitivity, 62–63
- requirement flowdown, 64
- SNR (signal-to-noise ratio), 62

system-level design, 61–62
 top-level design, 63–66
 OQPSK (offset quadrature phase-shift keying),
 251–254
 Orthogonal
 definition, 317
 frequency division. *See* OFDM (orthogonal
 frequency-division multiplexing).
 signals, 260–261
 spreading codes
 overview, 316–318
 OVSF (orthogonal variable spreading
 factor), 413
 PN (pseudonoise), 318–325
 Orthogonal frequency-division multiple access
 (OFDMA), 437
 Orthogonal frequency-division multiplexing
 (OFDM). *See* OFDM (orthogonal
 frequency-division multiplexing).
 Orthogonal variable spreading factor (OVSF), 413
 OVSF (orthogonal variable spreading factor), 413

P

PA (power amplifier), 65
 Pacific Digital Cellular System (PDC), 406
 Packet error rate (PER), 416
 Packet-reservation multiple access (PRMA), 331
 Packets, 326
 Packet-switched data network (PSDN), 398
 Packet-switching, 326
 Paging channels, 291
 Parity check, 376
 Partitioning channels, 173
 Passive systems, source of thermal noise, 39–44
 Path loss
 definition, 10
 link budget, 137–139
 propagation modeling
 carrier frequency, 101
 correction for antenna height, 92–93
 correction for terrain, 93–95
 error function, 98
 fade margin, 100
 Hata model, 87–90, 95, 98–100
 Lee model, 90–95
 probability density function, 96–100

range of loss, 96–100
 rural environment, 88
 shadowing losses, 96–100
 suburban environment, 88
 transmitter distance, 96–100
 urban environments, 88, 101
 Path metrics, 382
 Path-loss exponent, 32, 79
 PCM (pulse code modulation)
 aliasing, 358
 antialiasing filter, 358
 coding, 361
 decision levels, 359–361
 distortion, 358
 DPCM (differential PCM)
 adaptive, 371
 delta modulation, 369–371
 performance, 371
 sampling, 367–369
 slope overload noise, 370
 vs. LPC (linear predictive coder), 374
 overview, 356
 performance, 362–364
 quantization
 A-law compression, 367
 codecs, 366
 companders, 366
 compression/expansion, 364–366
 compressors, 364
 dynamic range, 364
 error, 362–364
 expanders, 364
 full-scale range quantizer, 361
 intervals, 359–361
 levels, 359–361
 mean-square quantization noise, 363
 midriser quantizer, 360–361
 midtread quantizer, 360–361
 μ -law compression, 367
 nonlinear, 364–367
 nonuniform, 364
 overview, 359–361
 SQNR (signal-to-quantization-noise ratio),
 362–364
 sampling, 356–359
 PCS (personal communication services), 4, 16

- PDC (Pacific Digital Cellular System), 406
- Peak frequency deviation, 256–257
- PER (packet error rate), 416
- Perceptual measures of quality. *See* Subscriber requirements.
- Phase-locked receivers, 238
- Phase-shift keying (PSK), 229, 244
- Physical layers, 397–398
- Plane wave incident, 79–80
- Planning systems. *See* Designing systems.
- PN (pseudorandom number), 268
- PN (pseudonoise) sequences, 402
- PN (pseudonoise) spreading codes, 318–325. *See also* Orthogonal, spreading codes.
- Poisson model, 190
- POTS (plain old telephone service), 9
- Power, measuring radiated
 - EIRP (effective isotropic radiated power), 29, 65–66
 - ERP (effective radiated power), 66
- Power factors, antennas
 - beamwidth, 25–27
 - distance between receiver and transmitter, 21–22
 - effective aperture, 21–22
 - gain, 26–27
- Power spectrum
 - amplifiers, 49
 - noise, calculating, 36–38, 41–43, 46
- p*-persistent CSMA, 331
- PPSDN (public packet-switched data network), 411–412
- Preamble interval, 301–302
- PRMA (packet-reservation multiple access), 331
- Probability density function, 96–100, 108
- Probability distribution function, 108
- Probability of error
 - digital signal performance, 208–211
 - a priori* probabilities, 209
 - and received power, 223–226
- Propagation modeling
 - carrier frequency. *See* Hata model; Lee model.
 - large-scale fading, 100
 - macroscopic fading, 100
 - microscopic fading, 100
 - path loss prediction
 - rural environments, 88
 - suburban environments, 88
 - urban environments, 88, 101. *See also* Hata model.
 - small-scale fading, 100
- Propagation of radio waves
 - Maxwell's equations, 18–19
 - physical circuits, effects of, 19
 - range equation, 20
 - in the real world. *See* Fading; Path loss; Propagation modeling.
 - in space, 18–20
- Protocol stack, 398
- PSDN (packet-switched data network), 398
- Pseudonoise (PN) sequences, 402
- Pseudonoise (PN) spreading codes, 318–325. *See also* Orthogonal, spreading codes.
- Pseudorandom number (PN), 268
- PSK (phase-shift keying), 229, 244
- PSTN (public switched telephone network), 184
- Pulse code modulation (PCM). *See* PCM (pulse code modulation).
- Pulse detection, 207–212
- Puncturing, 408
- ## Q
- QAM (quadrature amplitude modulation), 279
- QoS (quality of service). *See also* GOS (grade of service).
 - common parameters, 352
 - data, 353–354
 - designing for. *See* Optimizing systems.
 - images, 353
 - for information sources, 353–354
 - music, 353
 - perceptual measures. *See* Subscriber requirements.
 - speech, 353
 - subscriber requirements, 61–62
 - toll quality speech communication, 167
 - user expectations, 344–345
 - video, 353
- QPSK (quadrature phase-shift keying), 243–251
- QPSK modulation, 289–290
- Quadrature components, 238–239
- Qualcomm, Inc., 12, 289–290, 401

Quantization

- A-law compression, 367
 - codecs, 366
 - companders, 366
 - compression/expansion, 364–366
 - compressors, 364
 - dynamic range, 364
 - error, 362–364
 - expanders, 364
 - full-scale range quantizer, 361
 - intervals, 359–361
 - levels, 359–361
 - mean-square quantization noise, 363
 - midriser quantizer, 360–361
 - midtread quantizer, 360–361
 - μ -law compression, 367
 - nonlinear, 364–367
 - nonuniform, 364
 - overview, 359–361
 - SQNR (signal-to-quantization-noise ratio), 362–364
- Quantization error, 362–364
- Quantization intervals, 359–361
- Quantization levels, 359–361

R

- RAB (reverse activity bit), 430
- RACH (reverse access channel), 409
- Radiation patterns, antennas
- azimuth plane, 25
 - bandwidth planes, 25
 - beamwidth, 25–27
 - beamwidth, physical dimensions, 25–26
 - dipole antennas, 24–25
 - elevation plane, 25
 - far-field radiation region, 22
 - Fraunhofer region, 22
 - main beam, 22–23
 - main lobe, 22–23
 - plot of, 24
 - power pattern, 22
 - side lobes, 22–23
- Radio, history of, 10, 226
- Radio configuration (RC), 412
- Radio transmission technology (RTT). *See* RTT (radio transmission technology).
- Raised-cosine pulses, 234, 237
- RAKE receivers, 404
- Random numbers, collision prevention, 327
- Range
- antennas, calculating, 28–34
 - mobile unit to base station, 66–70
- Range equation
- alternate forms, 30
 - EIRP (effective isotropic radiated power), 29
 - example, 29
 - Friis transmission form, 30
 - optimizing systems, 63–66
 - overview, 28–34
 - propagation in free space, 20
 - variables, 63–66
- Range of loss, 96–100
- Raster images, 349
- Rate control, 429
- Rate set (RS), 422
- Rayleigh density function, 109–113
- Rayleigh fading, 101, 106–113
- RC (radio configuration), 412
- R-DCCH (reverse dedicated control channel), 424
- Received power, and probability of error, 223–226
- Receiver (Rx). *See* Rx (receiver).
- Receiving antennas, 19
- Reciprocity, antenna gain, 28
- Recovering information, 227
- Region of integration, 109
- Regulations. *See* Laws and regulations.
- Requirement flowdown, 64
- Requirements assessment, 150–153
- Resistors, source of thermal noise, 35–40
- Return-to-zero (RZ) line code, 206
- Reudink curves, 137
- Reuse distance, 163–164
- Reverse access channel (RACH), 409
- Reverse activity bit (RAB), 430
- Reverse control channels, 291
- Reverse dedicated control channel (R-DCCH), 424
- Reverse link configurations, 424
- Reverse power control subchannel (R-PCSCH), 423
- Reverse supplementary channel (R-SCH), 424

- RF links
 - definition, 17
 - designing. *See* Optimizing systems.
 - interference. *See* Noise.
 - power transmission. *See* Antennas.
 - range, calculating. *See* Range equation.
 - R-FCH (reverse fundamental channel), 424
 - Rice, S. O., 113
 - Ricean probability distribution, 113–114
 - Rise-over-thermal threshold (RoTT), 418
 - RMS (root mean square)
 - calculating, 38
 - delay spread, 101, 118–120
 - Roaming automation, 400
 - Rolloff parameter, 234
 - Root mean square (RMS)
 - calculating, 38
 - delay spread, 101, 118–120
 - Root-raised-cosine pulse, 237
 - RoTT (rise-over-thermal threshold), 418
 - R-PCSCH (reverse power control subchannel), 423
 - RS (rate set), 422
 - R-SCH (reverse supplementary channel), 424
 - RTT (radio transmission technology). *See also* HSPA (High-Speed Packet Access).
 - 1 × EV-DO (1× evolution for data only) Rev. 0. *See* DO (data only) standard.
 - 1 × EV-DO (1× evolution for data optimized) Rev. A, 441
 - 1 × EV-DV (1× evolution for data and voice). *See* DV (data and voice) standard.
 - 1 × RTT (1× radio transmission technology), 421–426
 - DO (data only) standard, 425–432
 - DV (data and voice standard), 425–426
 - FCH (fundamental channel), 421
 - forward link configurations, 421
 - H-ARQ (hybrid automatic repeat request), 430
 - MAC index. *See* MAC-ID.
 - MAC-ID, 427–432
 - overview, 420–421
 - rate control, 429
 - R-DCCH (reverse dedicated control channel), 424
 - reverse link configurations, 424
 - R-FCH (reverse fundamental channel), 424
 - R-PCSCH (reverse power control subchannel), 423
 - R-SCH (reverse supplementary channel), 424
 - SCCH (supplemental code channel), 421
 - SCH (supplementary channel), 421–422
 - transition probability, 431
 - Rural environments, path loss, 88
 - Rx (receiver)
 - definition, 10
 - performance, 222–226
 - sensitivity, 30, 62–63
 - thermal noise analysis. *See* Thermal noise.
 - RZ (return-to-zero) line code, 206
- ## S
- SACCH (slow associated control channel), 303–305
 - Samplers, 208
 - Sampling, 356–359, 367–369
 - Sampling theorems, 235
 - Scalable OFDM (SOFDM), 437
 - SCCH (supplemental code channel), 421
 - SCH (supplementary channel), 421–422
 - Scheduler, 417
 - SDMA (space-division multiple access), 439
 - Second generation (2G), 400–405
 - Second generation (2.5G)
 - CNIR (carrier-to-noise-and-interference ratio), 407
 - EDGE (Enhanced Data for Global Evolution), 410–411
 - GPRS (General Packet Radio Service), 408–410
 - HSCSD (High-Speed Circuit-Switched Data), 407–408
 - puncturing, 408
 - RACH (reverse access channel), 409
 - Sectoring, 175–179, 193–194
 - Selective bandpass filter, 171

- Sensitivity, 34
- Separation distance (AM channels), 298–299
- Separation distance (geographic), 156, 161–163
- SF (spreading factor), 267
- Shadowing losses, 96–100
- Shannon, Claude, 227
- Sharing bandwidth. *See* Multiple user channels.
- Sharp cutoff filters, 171
- Side lobes, 22–23
- Signaling. *See* Baseband signaling; Carrier-based signaling; Spread-spectrum signaling.
- Signal-processing functions, 7
- Signal-to-quantization-noise ratio (SQNR), 362–364
- Single full-duplex, 300
- Sinks, 6–7
- SIR (signal-to-interference ratio), 155, 169, 298–299
- 16-QAM modulation, 279
- 64-QAM modulation, 279
- Slope overload noise, 370
- Slotted Aloha, 328–330
- Slow associated control channel (SACCH), 303–305
- Slow fading, 127–128, 131–132
- Slow frequency hoppers, 269
- Small-scale fading, 100
- Snell's law, 79–80
- SNIR (signal-to-noise-and-interference ratio), 154
- SNR (signal-to-noise ratio)
 - optimizing systems, 62–63
 - speech sources, 347
 - waterfall curves, 223–226
- SOFDM (scalable OFDM), 437
- Soft handoffs, 404
- Source coding. *See* LPC (linear predictive coder); Vocoders.
- Sources of information
 - in block diagrams, 6–7
 - data
 - BER (bit error rate), 351
 - burstiness, 351
 - delays, 352
 - QoS (quality of service), 353–354
 - source characteristics, 351
 - subscriber requirements, 351–352
 - throughput, 351
 - datagrams, 354
 - error correction. *See* Coding for error correction.
 - images
 - QoS (quality of service), 353
 - source characteristics, 349
 - subscriber requirements, 349
 - music
 - QoS (quality of service), 353
 - source characteristics, 348
 - subscriber requirements, 348–349
 - QoS (quality of service)
 - common parameters, 352
 - for information sources, 353–354
 - perceptual measures. *See* Subscriber requirements.
 - streaming vs. bursting, 354–355
 - video
 - QoS (quality of service), 353
 - source characteristics, 350
 - subscriber requirements, 350–351
- Sources of information, speech
 - delay budget, 347
 - delay jitter, 347
 - delays, 347–348
 - digitizing. *See also* PCM (pulse code modulation).
 - formants, 371
 - LPC (linear predictive coder), 373–376
 - model of human voice, 371–373
 - overview, 355–356
 - source coding. *See* LPC (linear predictive coder); Vocoders.
 - vocoders, 371–376
 - VSELPC (vector-sum excited linear predictive coder), 375
 - waveform coding. *See* PCM (pulse code modulation).
- dynamic range, 347
- QoS (quality of service), 353
- SNR (signal-to-noise ratio), 347
- source characteristics, 347
- streaming signals, 347
- subscriber requirements, 347–348

- Space-division multiple access (SDMA), 439
- Spectral efficiency
 - BFSK (binary frequency-shift keying), 258
 - cost of, 279
 - definition, 237
 - FSK (frequency-shift keying), 257
 - increasing, 279
 - QPSK (quadrature phase-shift keying), 243–245
- Spectral shaping, 298–299
- Spectrum allocation. *See also* Traffic engineering, available channels, and number of subscribers, 152–153
 - cochannel interference, 153. *See also* Interference prediction.
 - distinct channels available, 152
 - example, 151
 - FDM (frequency-division multiplexing), 151
 - FDMA (frequency-division multiple access), 151
 - interference-limited systems, 153
 - laws and regulations, 150–151
 - noise-limited systems, 152
 - NTIA chart of, 8
- Spectrum shortages, history of, 12
- Speech
 - delay budget, 347
 - delay jitter, 347
 - delays, 347–348
 - digitizing
 - formants, 371
 - LPC (linear predictive coder), 373–376
 - model of human voice, 371–373
 - overview, 355–356
 - vocoders, 371–376
 - VSELPC (vector-sum excited linear predictive coder), 375
 - dynamic range, 347
 - QoS (quality of service), 353
 - SNR (signal-to-noise ratio), 347
 - source characteristics, 347
 - streaming signals, 347
 - subscriber requirements, 347–348
- Spreading factor (SF), 267
- Spreading interference. *See* Spread-spectrum signaling.
- Spread-spectrum modulation, 306–307
- Spread-spectrum signaling. *See also* Baseband signaling; Carrier-based signaling; CDMA (code-division multiple access).
 - chips, 271
 - DSSS (direct-sequence spread spectrum), 271–278
 - fast hoppers, 269
 - FHSS (frequency-hopping spread spectrum), 268–270
 - hopping away from interference, 270
 - narrowband interference, 269–270, 275–278
 - necessary conditions, 267
 - overview, 267–268
 - SF (spreading factor), 267
 - slow hoppers, 269
 - spreading interference, 276
- Spread-spectrum techniques, 12, 401
- Spread-spectrum-based code-division. *See* CDMA (code-division multiple access).
- SQNR (signal-to-quantization-noise ratio), 362–364
- Square grid, 158–160
- Standards. *See also* Laws and regulations; RTT (radio transmission technology).
 - ANSI (American National Standards Institute), 401
 - ANSI/TIA/EIA-136, 401
 - cdma2000. *See* RTT (radio transmission technology).
 - D-AMPS (Digital Advanced Mobile Phone Service), 401
 - GPRS (General Packet Radio Service), 408–410
 - GSM (Global System for Mobile Communications), 12
 - HSPA, 414
 - HSUPA, 414
 - IS-95, 12
 - IS-95A, 401
 - IS-95B, 401
 - ITU (International Telecommunication Union), 405
 - NA-TDMA (North American Time-Division Multiple Access), 401

TIA/IS-41 Interim, 400
 TIA/IS-54, 401
 USDC (U.S. Digital Cellular), 401
 Statistical model, moving receiver, 129–132
 Streaming signals
 speech sources, 347
 vs. bursting, 325–326, 354–355
 Subscriber density. *See also* Multiple user channels.
 cell radius, effects of, 173–175
 growth. *See* Cells, splitting; Sectoring.
 managing, 156
 Subscriber requirements. *See also* GOS (grade of service); QoS (quality of service).
 data, 351–352
 designing for, 61–62
 images, 349
 music, 348–349
 speech sources, 347–348
 video, 350–351
 Subscribers
 calling habits, 189
 end users, definition, 6
 maximum, CDMA, 311, 323–234
 maximum, TDMA, 300
 Subsystems, 13
 Suburban environments, path loss, 88
 Supergroups, 297
 Supplemental code channel (SCCH), 421
 Supplementary channel (SCH), 421–422
 Switch state, 453–454
 Switch state probabilities, 457–460
 Symbol period, 205
 Sync channels, 291
 Sync interval, 301–302
 System architecture, 150–153. *See also* Designing systems.
 System loss, 31
 System noise, 9. *See also* Noise.
 System-level design, 61–62
 Systems, definition, 13
 Systems engineers
 applicable disciplines, 14
 development processes, 14–15
 responsibilities, 15
 role of, 12–15
 system documentation, 15

T

TC (turbo coder), 413
 TDM (time-division multiplexing),
 415–416
 TDM time interval (TTI), 416–417, 420
 TDMA (time-division multiple access)
 efficiency, 301
 frame preamble, 301
 frames, 301
 GSM (Global System for Mobile Communications), 304–305
 guard interval, 301–302
 maximum subscribers, 300
 overview, 300–302
 preamble interval, 301–302
 sync interval, 301–302
 time-division duplexing, 305–306
 USDC (U.S. Digital Cellular), 302–304
 Telecommunications Industry Association (TIA),
 400
 Telegraphy, history of cellular systems, 226
 Television, NTSC scans, 349
 Thermal noise. *See also* Noise.
 average power, 37–41
 definition, 34
 Johnson noise, 38–39
 mobile telephone receiver, example, 58–60
 noise floor, 35
 output-noise power spectrum
 average power, 44–45
 calculating, 42, 56–57
 LNA (low-noise amplifier), 56–57
 power spectrum, 36–38
 sources of
 amplifiers, 44–45
 passive systems, 39–44
 resistors, 35–40
 RMS (root mean square), calculating, 38
 typical values, 60
 white noise
 available power, 46
 definition, 36
 noise temperature, 45–46
 power spectrum, 36–37
 Thermal noise, two-ports
 available gain, 47–49
 Butterworth filter, 50

- Thermal noise, two-ports (*Continued*)
 - cascade of, 54–57
 - definition, 47
 - effective input-noise temperature
 - calculating, example, 58–61
 - calculating output-noise power spectrum, 57
 - definition, 51
 - vs. noise figure, 54–55
 - LNA (low-noise amplifier), 56–57
 - lossy transmission lines, 57–58
 - noise bandwidth, 49–50
 - noise figure
 - calculating, example, 58–61
 - overview, 50–54
 - vs. effective input-noise temperature, 54–55
- Third generation (3G)
 - overview, 405–407
 - OVSF (orthogonal variable spreading factor), 413
 - PPSDN (public packet-switched data network), 411–412
 - W-CDMA (Wideband Code-Division Multiple Access), 411–414
- Third Generation Partnership Project (3GPP), 406
- Third Generation Partnership Project 2 (3GPP2), 406
- Threshold comparators, 208
- Throughput
 - calculating, 334–335
 - data transmission, 351
 - definition, 190
- TIA (Telecommunications Industry Association), 400
- TIA/IS-54 standard, 400
- Time dispersive channels, 118
- Time-division duplexing, 305–306
- Time-division multiple access (TDMA). *See* TDMA (time-division multiple access).
- Time-division multiplexing (TDM), 415–416
- Time-varying channels, 121
- Titanic*, wireless system, 1
- Toll quality speech communication, 167
- Top-level design, 63–66
- Trade-offs, 173–175
- Traffic engineering
 - average call duration, 189
 - average holding time, 189
 - blocked calls, 188, 453
 - blocked calls cleared model, 190–191, 453
 - blocked calls delayed model, 190–191, 453
 - blocking probability, 460–461
 - call arrival model, 454–455
 - carried load, 190
 - carried traffic intensity, 190
 - definition, 188–189
 - Erlang B formula, 460–465
 - Erlang B table, 465–475
 - GOS (grade of service), 189, 453–454
 - hold time model, 456
 - offered load, 189, 460–461
 - offered traffic intensity, 189
 - Poisson model, 190
 - state of the switch, 453–454
 - subscriber calling habits, 189
 - switch state probabilities, 457–460
 - throughput, 190
 - trunking efficiency, 192–194
 - trunking theory, 188
 - trunks, 188
- Transducers, 19. *See also* Antennas.
- Transferring calls. *See* Handoffs.
- Transition probability, 431
- Transmitter (Tx). *See* Tx (transmitter).
- Transmitter distance, path loss, 96–100
- Transmitting antennas, 19
- Trellis diagrams, 379–380
- Triangular grid, 158–160
- Triple redundancy, 377
- Trunking, 187–194
- Trunking efficiency, 192–194
- Trunking theory, 188
- Trunks, 188
- TTI (TDM time interval), 416–417, 420
- TTL (transistor-transistor logic), 205
- Turbo coder (TC), 413
- Turbo coders, 413
- 2G (second generation), 400–405
- 2.5G (second generation)
 - CNIR (carrier-to-noise-and-interference ratio), 407
 - EDGE (Enhanced Data for Global Evolution), 410–411
 - GPRS (General Packet Radio Service), 408–410
 - HSCSD (High-Speed Circuit-Switched Data), 407–408

puncturing, 408
 RACH (reverse access channel), 409
 2B1Q line code, 207
 Two-ports. *See* Thermal noise, two-ports.
 Two-ray model, 102–106, 121–129
 Tx (transmitter)
 definition, 9
 line drivers, 9
 signal-processing functions, 7
 wired systems, 9
 wireless systems, 9

U

UEs (user elements), 416
 UHF (ultra-high frequency), 8
 UMB (Ultra-Mobile Broadband), 440–441
 UMTS (Universal Mobile Telecommunications System), 289, 406
 UMTS Release 5. *See* HSDPA (High-Speed Downlink Packet Access).
 UMTS Release 99, 414
 Unlicensed radio services, 150
 Uplink, 66–70
 Urban environments, path loss predictions, 88, 101.
 See also Hata model.
 U.S. Digital Cellular (USDC) standard. *See* USDC (U.S. Digital Cellular) standard.
 USDC (U.S. Digital Cellular) standard
 2G (second generation) systems, 401
 history of, 289–290
 overview, 302–304
 Users. *See* Subscribers.
 UTRA (Universal Terrestrial Radio Access), 406

V

VBR (variable bit rate), 403
 Video
 QoS (quality of service), 353
 source characteristics, 350
 subscriber requirements, 350–351

Video conferencing, 350–351
 Viterbi, A. J., 383
 Viterbi algorithm, 383–387
 VLR (visitor location register), 441
 Vocoders
 DPCM vs. LPC, 374
 formants, 371
 LPC (linear predictive coder), 373–376
 model of human voice, 371–373
 VSELPC (vector-sum excited linear predictive coder), 375
 VoIP (voice over IP), 415, 431
 VSELPC (vector-sum excited linear predictive coder), 375

W

Walsh functions, 317, 402–403
 Waterfall curves, 223–226
 Waveform coding. *See* PCM (pulse code modulation).
 Wavelength, relation to frequency,
 8
 W-CDMA (Wideband Code-Division Multiple Access), 289, 406, 411–414
 White noise
 available power, 46
 definition, 36
 noise temperature, 45–46
 power spectrum, 36–37
 Wiener-Khinchine theorem, 217–218
 WiFi (Wireless Fidelity), 25
 WiMAX (Worldwide Interoperability for Microwave Access), 440
 Wired systems
 transmitters, 9
 vs. wireless, 5
 Wireless systems
 definition, 4
 overview, 4–6
 vs. wired systems, 5