
I N D E X

A

A (forward lookups) records (DNS), 286-287
 ACCEPT packet target (iptables), 215
 access, NFS (Network File System) servers, limiting, 476
 access control lists (ACLs). *See* ACLs (access control lists)
 accounts. *See also* users
 NIS (Network Information Services), adding, 487
 passwords, changing, 142-143
 root accounts, 144
 trust accounts, Samba workstations, 163-164
 ACE/SecurID, 586
 Acknowledgment Number field (TCP headers), 588
 ACLs (access control lists), 256
 limiting, Squid Web caching proxy servers, 525
 Active Directory Service, 499
 active FTP, 32, 238-239
 address assignments, subnet masks, calculating, 22
 address ranges, calculating, 22-23
 addresses
 169.254.0.0 addresses, DHCP clients, 140
 IP addresses
 APIPA (Automatic Private IP Addressing), 140
 assignment automation, 19-20
 changing, 37-38
 checking, 85
 configuring, 36-46
 determining, 36-37
 dynamic IP addresses, 40
 grouping, 21-24
 localhost IP address, 18
 network device access, 17-21
 private IP addresses, 17
 publicizing, 18-19
 static IP addresses, 40
 Web domain linking, 20
 MAC (media access control) addresses, 26-27
 viewing, 62-63
 overlapping e-mail addresses, handling, 363
 administrator users, creating for PDCs (Primary Domain Controllers), 162-163
 adsl-setup script, 43-44
 AH (authentication header), 583

aliases
 interfaces, 39
 IP aliases, 39
 sudoers file, 147
 aliases (CNAME) resource record (DNS), 284-287
 Alternate Address for Host ICMP code, 590
 ampersand wildcard (NFS automounter), 471
 anonymous FTP, 32, 238, 240
 RPMs (Red Hat Package Manager) files, downloading, 104-106
 automounter (NFS)
 map files, 468-471
 starting, 471-472
 Apache, 313
 Browser 403 Forbidden messages, 332
 configuring, 315-323, 331
 IP addresses, 323-327
 multiple sites, 323-327
 DHCP, 314
 DNS, configuring for, 314
 downloading, 313
 error log files, 335
 file permissions, 316
 HTTP connectivity, testing, 332
 installing, 313
 MRTG (Multi-Router Traffic Grapher), configuring for, 377-378
 NAT firewalls, running behind, 329-330
 server name errors, 333
 starting, 314
 status log files, 333-334
 troubleshooting, 332-335
 upgrades, incompatibility, 333
 virtual hosting
 IP-based virtual hosting, 321-322
 named virtual hosting, 320-321
 SSL, 322-323
 Web pages
 data compression, 327-328
 directories, password protection, 330-331
 placement, 315-320
 Apache File Permissions script, 591
 APIPA (Automatic Private IP Addressing), 140
 Application Layer (OSI), 12
 ARP (Address Resolution Protocol)
 MAC (media access control) addresses, mapping to IP addresses, 26-27
 proxy ARP, 53-54

assignments
 addresses, subnet masks, 22
 IP addresses
 cable modem connections, 45
 DHCP (Dynamic Host Configuration Protocol), 19-20
 DSL connections, 40-43
 users to groups, 143
 asterisk wildcard (NFS automounter), 471
 attacks, sources, determining, 88
 authconfig command, 488
 authentication
 HMAC (hashed message authentication code), 584
 RADIUS (Remote Authentication Dial-in User Service), 499
 VPNs (virtual private networks), 583-584
 temporary connections, 586-587
 authentication header (AH), 583
 authoritative DNS servers, 276
 automated assignments, IP addresses, DHCP (Dynamic Host Configuration Protocol), 19-20
 Automatic Private IP Addressing (APIPA), 140
 automating installations, Kickstart servers, 417
 automounter, NFS (Network File System), 468-472

B

background mounting, NFS (Network File System), 459
 backups, 443
 MySQL databases, 555
 Bad Length ICMP code, 590
 Berkeley Internet Name Domain Project (BIND).
See BIND (Berkeley Internet Name Domain Project)
 bidirectional traceroutes, 75
 BIND (Berkeley Internet Name Domain Project), 276, 279
 caching DNS name servers, configuring, 280-281
 configuring, 279-293
 downloading, 279
 file locations, 281
 installing, 279
 regular DNS servers, configuring, 282-293
 starting, 279
 troubleshooting, 294-301
 bind errors (LDAP), 513
 BIND views, DNS zone files, 609-612
 blacklists, spam, sendmail, 358
 boot CDs, creating, 416, 544-545
 boot loader code (MBR), 121
 boot partitions, 122
 boot process, 121
 boot partitions, 122
 GUI consoles, 124-125
 MBR (master boot process), 121-122
 rebooting, 125-128

runlevels, 122-123
 default runlevels, 123-124, 128
 running programs at, 129-133
 system shutdown, 125-126
 text terminals, attaining, 125
 branches (SMI trees), 365
 bridging mode firewalls, proxy ARPs, 53
 Browser 403 Forbidden messages, Apache, 332
 business DSL lines, subnet masks, 24

C

cable modem connections, IP addresses, assigning, 45
 cables
 color-coding, 8
 crossover cables, DCE/DTE connections, 28
 labeling, 8
 straight-through cables, DCE/DTE connections, 28
 testing, 58
 caching
 DNS name servers, 276-277, 280-281
 read ahead caches, 459
 VFS (virtual filesystem), 459
 carrier errors, NICs (Network Interface Cards), 62
 CAs (Certification Authorities), 585
 CATOS switches, 623
 configurations, saving to TFTP servers, 258
 CD (collision detect), data transmission garblings, detecting, 24
 CD-ROMs, RPMs (Red Hat Package Manager)
 files, installing from, 113-114
 Certification Authorities (CAs), 585
 CGIs (Common Gateway Interfaces), security contexts, 318-320
 chains
 iptables, user-defined chains, 219
 nat table, iptables, 212
 Checksum field (TCP headers), 588
 Checksum field (UDP headers), 588
 chroot jails, 281
 Cisco CSS11000 load balancer series, 625
 CLI (command line interpreter), MySQL servers, 550
 clients
 configuring, syslog servers, 95
 DDclient, dynamic DNS, 307-310
 DHCP clients, 169.254.0.0 addresses, 140
 DHCP servers, configuring to use, 139
 DNS (Domain Name System), 276
 dynamic DNS clients, installing, 306
 firewalls, FTP (File Transfer Protocol), 240-241
 LDAP clients, configuring, 505-507
 NFS clients, configuring, 463-467, 481-483
 NIS clients
 configuring, 488-491
 passwords, 495-496
 troubleshooting, 497-498
 NTP clients, configuring, 407
 RPCs (remote procedure calls), 459

Samba
 adding to, 164-166
 automated mounting, 178
 connectivity, 181-185
 Windows drives shares, 175-178
sendmail clients
 configuring, 343
 converting, 343-345
TELNET, 252
clocks, synchronizing, NTP (Network Time Protocol), 401
CNAME (aliases) records (DNS), 286-287
code
 Apache File Permissions script, 591
 iptables scripts, 598-600
 Sendmail Spam Filter script, 592-593
collision detect (CD), data transmission garblings, detecting, 24
collisions, NICs (Network Interface Cards), 62
color-coding cables, 8
command line
 link status, testing, 60
 MySQL servers, accessing, 550
command switch operations, iptables, 216-219
command-line anonymous FTP, RPMs (Red Hat Package Manager) files, 104-106
commands
 add, 139
 adsl-status, 43-44
 authconfig, 488
 cd, 440
 cfgmaker, 375
 chgrp, 155, 510
 chkconfig, 129-133, 151, 265, 268, 514
 chmod, 155, 510
 chown, 144, 507
 chroot, 281
 curl, 68-69
 d, 438
 date, 404
 describe, 553
 df -k, 427
 dir, 240
 dump, 440
 edquota, 453
 edquota -u, 454
 ethtool, 50-51, 60
 exit, 128, 452
 fdisk, 428, 444
 fdisk -l, 427
 free, 382-383
 FTP, 105
 get, 240
 getent, 489
 grep, 461
 groups, 143
 help, 104
 host, 86, 278
 ifconfig, 36-37, 59, 61, 200
 ifconfig -a, 59
 ifdown, 38, 45, 190
 ifup, 38, 45, 190
 indexmaker, 376, 389
 init, 125-126, 128
 ipsec auto --status, 569
 iwconfig, 189-190, 200
 iwlist, 200-201
 iwspy, 201-202
 L, 429
 last, 89
 ldapsearch, 505, 511
 locate, 386
 logging host, 625
 logging trap, 625
 ls, 240
 ls -a, 264
 lsmod, 538
 lspci, 538
 make, 154, 340, 494
 make dep, 542
 make install, 543
 make mrproper, 539
 man, 32
 mii-tool, 49-50
 mil-tool, 60
 minicom, 581
 mkfs, 439
 mkisofs, 414
 mkraaid, 431
 modprobe, 538
 mount, 177-178, 414, 452, 459
 mtr, 79
 netstat, 70, 88
 netstat -nr, 45
 nmap, 87-88
 nslookup, 85-86, 278
 ntp server, 407
 ntp update-calendar, 407
 ntpdate, 404
 ntpq, 404
 p, 429
 passwd, 162, 514
 ping, 64-65
 pkill, 158
 portmap, 488
 quotacheck, 453
 rmmmod, 538
 route add, 47-48
 rpcinfo, 497
 rpm -e, 119
 rpm -qa, 117
 select, 554
 service, 502
 service iptables save, 236
 service iptables status, 211
 show databases, 551
 show tables, 553
 shutdown, 126
 smbmount, 177
 snmpget, 387

snmpwalk, 387
ssh, 267, 269
stunnel, 508-511
sudo commands, tracking, 148
tar, 119-120, 443
tcpdump, 79-82, 512
tcpdump command, 571
telnet, 65-68
test, 554
tethereal, 83-85
top, 381-382
traceroute, 71-75, 77-78
tracert, 72
uname -a, 269
useradd, 141-144, 154, 509
userdel, 143
usermod, 141-144
vgcreate, 446
visudo, 145
vmstat, 382
w, 429
wall, 441, 443
wget, 69, 88, 107
who, 89, 441, 443, 451
ypbind, 488, 495
ypcat, 489
ypmatch, 489
yppasswd, 488, 496
ypxfrd, 492
yum, 107-113
 yum update, 110
comments, sendmail.mc files, putting in, 341
Communication Administratively Prohibited
 ICMP code, 589
community strings, SNMP (Simple Network
 Management Protocol), 368
compiling code, 542
compression
 logrotate log files, 98-99
 Web pages, Apache, 327-328
configuration
 /etc/hosts files, 54-55
 Apache servers, 315-323, 331
 IP addresses, 323-327
 MRTG (Multi-Router Traffic Grapher),
 377-378
 multiple sites, 323-327
 virtual hosting, 320-323
DHCP servers, 139, 416
Fedora Linux
 MRTG, 621-622
 version differences, 617-620
 Webalizer, 622
FTP servers, 414
gateways, 47-48
installation servers, 412-416
kernel, 540-542
Kickstart servers, 412-416
LDAP (Lightweight Directory Access Protocol),
 501-511
Linux-WLAN, 194-196
logrotate, 96-97
LVM (Logical Volume Manager), 443-449
MRTG (Multi-Router Traffic Grapher), 375-377,
 389-395
MySQL databases, 554
NFS (Network File System), 462-468
NFS clients, 481-483
NFS servers, 415, 480-481
NIS clients, 488-491
NIS servers, 483-486
NIS slave servers, 491-495
NTP (Network Transfer Protocol), 402-403
NTP clients, 407
NTP servers, 406-407
POP mail servers, 362-363
RADIUS for LDAP, 517-522
routers, 623
Samba, 151
 as PDC (Primary Domain Controller),
 158-162
 SWAT, 152-158
sendmail, 337-357
 clients, 343-345
 DNS, 342-343
 incoming mail, 338
 installing, 340
 macros, 338-339
 masquerading, 350-352
 outgoing mail, 338
 restarting, 340-341
 sender address changes, 352-353
 starting, 340
 troubleshooting, 353-357
servers, 35, 45-54
 /etc/hosts files, 54-55
 IP addresses, 36-46
software-based RAID disk controllers, 427-434
Squid Web caching proxy servers, 524-530
SSH (Secure Shell), 265-266
Syslog, 623-625
 Cisco network devices, 96
 clients, 95
 servers, 94-95
TELNET servers, 254
TFTP servers, 257-262
VPNs (virtual private networks), 563-569
VSFTPD, 243-245
Web servers, 414
Wireless Tools, 189-190
 yum automatic RPM update program, 108-109
configuration files (DNS), loading, 292
congestion, detecting, mtr command, 79
connection channels, FTP (File Transfer
 Protocol), 237-238
connections
 breaking, 66
 cable modem connections, IP address
 assignations, 45

- DSL connections, IP address assignations, 40-43
- establishing, TCP (Transmission Control Protocol), 14-15
- LANs (local area networks), routers, 29
- connectivity
 - Apache, testing, 332
 - disconnections, causes, 58
 - iptables firewall, 71
 - MySQL servers, testing, 557
 - network congestion, detecting, 79
 - testing
 - netstat command, 70
 - ping command, 64-68
 - Samba, 181-185
 - traceroute command, 71-78
 - VPNs, testing, 570
 - Web sites, testing, 304-305
- containers, Web sites, 315
- conversions, servers into routers, 52-54
- copying
 - files, 269-271
 - kernel, 543
- counter values, tracking, MIBs, 386
- CPUs, monitoring
 - MIBs, 388
 - top command, 381
- crash recoveries, 544
- CRC errors, NICs (Network Interface Cards), 62
- crossover cables, DCEs/DTEs, connecting, 28
- CSMA (carrier sense, multiple access) methodology, data transmissions, 24
- CSS 11000 Arrowpoints, configurations, saving to TFTP servers, 259
- CSS11000 load balancer series, 625
- current routing tables, viewing, 45-46
- custom kernels
 - /boot partition, copying, 543
 - compiling, 542
 - creating, 539-543
 - modules, 542-543
- D**
 - daemons, NFS (Network File System), 460
 - daisy chaining LANs (local area networks), 29
 - data, backing up, 443
 - Data Circuit-Terminating Equipment. *See* DCEs (Data Communications Equipment)
 - data communications
 - DCEs (Data Communications Equipment), 27-28
 - OSI (Open System Interconnection) model, 12
 - layers, 12-13, 24-25
 - TCP, 14-16
 - TCP/IP, 13, 16-24
 - UDP (User Datagram Protocol), 15
 - Data Communications Equipment (DCE). *See* DCE (Data Communications Equipment)
 - data compression, Web pages, Apache, 327-328
 - Data field (TCP headers), 588
 - data migration, hard disk partitions, 440-442
 - Data Offset field (TCP headers), 588
 - data packets. *See* packets
 - data storage disks
 - directories, mounting, 457
 - file systems, 457
 - NFS (Network File System)
 - access limitations, 476
 - automounter, 468-472
 - configuring, 462-468
 - daemons, 460
 - export nesting, 476
 - file locking, 476
 - file permissions, 476
 - hanging, 475-476
 - installing, 461-462
 - root access limitations, 476
 - rules, 458
 - security, 475
 - troubleshooting, 472-474
 - VFS (virtual filesystem), 458-460
 - data tables, MySQL servers, 552-553
 - Data Terminal Equipment (DTE). *See* DTE (Data Terminal Equipment)
 - data transmissions, CSMA (carrier sense, multiple access) methodology, 24
 - databases, MySQL servers
 - backing up, 555
 - configuring, 554
 - creating, 550-551
 - deleting, 550
 - directories, 501, 505
 - preparing for, 548
 - restoration, 556
 - viewing, 552-554
 - DCEs (Data Communications Equipment), 27
 - connecting, 28
 - DCs (domain components), 500
 - DDclient, dynamic DNS, 307-310
 - DDNS (dynamic DNS). *See* dynamic DNS
 - dedicated hosting, 5-6
 - default gateways, 31
 - changing, 46
 - WLANs, pinging, 203
 - deleting users, 143
 - dependencies, failed dependencies, RPM installations, 115
 - Destination Host Unknown ICMP code, 589
 - Destination Host Unreachable for Type of Service ICMP code, 589
 - Destination Network Unknown ICMP code, 589
 - Destination Network Unreachable for Type of Service ICMP code, 589
 - destination unreachable codes (ICMP), 589
 - Detailed View page (MRTG), 389
 - devices
 - polling, MRTG (Multi-Router Traffic Grapher), 377
 - routers, configuration, 623
 - DF Bit field (IP headers), 587

- DHCP (Dynamic Host Configuration Protocol), 37-38
 Apache servers, 314
 DNS, 39, 299
 DNS zone files, conflicts, 303
 Fedora Linux, version differences, 618
 IP addresses, assigning, 19-20
 DHCP DSL, port forwarding type NAT, iptables, 230
 DHCP servers
 clients, 139-140
 configuring, 416
 installing, 135-137
 multiple NICs, 138-139
 starting, 138
 troubleshooting, 139-140
 dial up connections, authentication, VPNs (virtual private networks), 586
 direct maps (NFS automounter), 469
 directives, Web sites, 315
 directories
 Active Directory Service, 499
 exporting, NFS (Network File System), 458
 hard disk partitions, placing on, 439-440
 Kickstart servers, creating, 412
 LDAP, 500-501
 NDS (Novell Directory Services), 499
 root directories, 499
 tree hierarchies, 499
 disconnections
 causes, 58
 performing, 66
 disk mirroring (RAID 1), 423
 disk quotas, 451
 /etc/fstab file, editing, 452
 file system, remounting, 452
 grace periods, editing, 454
 group quotas, editing, 455
 partition quota configuration files, creating, 453
 quota tables, initializing, 453
 reports, getting, 455
 setting, 451-454
 single-user mode, 451-452
 testing, 454
 user quota information, editing, 453
 disks
 adding, 435-442
 directories, mounting, 457
 filesystems, 457
 names, conventions, 436
 NFS (Network File System)
 access limitations, 476
 automounter, 468-472
 configuring, 462-468
 daemons, 460
 export nesting, 476
 file locking, 476
 file permissions, 476
 hanging, 475-476
 installing, 461-462
 root access limitations, 476
 rules, 458
 security, 475
 troubleshooting, 472-474
 VFS (virtual filesystem), 458-460
 partitions
 data migration, 440-442
 deleting, 438
 directory structure, 439-440
 LVM (Logical Volume Manager), 442-449
 preparing, 437-439
 primary partitions, 438
 verifying, 439
 types, determining, 436
 distribution CDs, RPMs (Red Hat Package Manager) files, 102
 DNAT packet target (iptables), 215
 DNS (Domain Name System), 275
 Apache servers, configuring for, 314
 BIND (Berkeley Internet Name Domain Project), 276
 configuring, 279-293
 downloading, 279
 file locations, 281
 installing, 279
 starting, 279
 troubleshooting, 294-301
 clients, 276
 configuration files, loading, 292
 DHCP, 299
 domains, 276
 migration plans, 298-299
 registering, 277, 293
 dynamic DNS, 20, 303-304
 clients, 306
 connectivity testing, 304-305
 DDclient, 307-310
 free dynamic DNS, 306
 NAT routers/firewalls, 307
 paid customized DNS, 306
 registering, 305-306
 SOHO firewalls/routers, 307
 testing, 310
 Fedora Linux, version differences, 618
 forward zone files, 287-288
 FQDNs (fully qualified domain names), 278-279
 IP addresses, linking to Web domain, 20
 iptables, access, 227
 NAT, 289-292
 NFS (Network File System), 464
 resource records, 284-287
 reverse zone files, 288-289
 security, 299-301
 sendmail, configuring, 342-343
 static DNS, 303
 testing
 host command, 86
 nslookup command, 85-86
 troubleshooting, 85
 zone files, DHCP conflicts, 303

DNS servers
 authoritative DNS servers, 276
 caching DNS name servers, 276-277
 configuring, 280-281
 DHCP, 39
 dynamic DNS servers, 277
 querying, nslookup command, 86
 regular DNS servers, configuring, 282-293
 static DNS servers, 277
 DNS zone files, BIND views, 609-612
 DocumentRoot statement, 315
 domain name system (DNS). *See* DNS (domain name system)
 domains
 BIND (Berkeley Internet Domain Name Project), 279
 configuring, 279-293
 file locations, 281
 starting, 279
 troubleshooting, 294-301
 DNS (domain name system), 276
 FQDNs (fully qualified domain names), 278
 IP addresses, linking to, 20
 migration plans, 298-299
 NIS (Network Information Services),
 initializing, 485
 registering, 277, 293
 downloading
 Apache, 313
 BIND (Berkeley Internet Name Domain Project), 279
 FreeRADIUS, 518
 iptables, 211
 kernel source RPM package, 534
 LDAP (Lightweight Directory Access Protocol), 501
 MRTG (Multi-Router Traffic Grapher), 374
 Squid Web caching proxy servers, 524
 VSFTPD, 242
 drivers, 533
 drives, sharing, Samba client, 175-178
 DROP packet target (iptables), 215
 DSL
 connections, IP address assignments, 40-43
 DHCP DSL, port forwarding type NAT, 230
 lines, subnet masks, 24
 DTE (Data Terminal Equipment), 27-28
 dumb terminals, 581-582
 duplex NICs, changing, 49-51
 duplex data paths, 25-26
 dynamic DNS (DDNS), 20, 303-304
 clients, installing, 306
 DDclient, 307-310
 free dynamic DNS, 306
 ISP connectivity, testing, 304-305
 NAT routers/firewalls, conflicts, 307
 paid customized DNS, 306
 registering, 305-306
 SOHO routers/firewalls, 307
 testing, 310

dynamic DNS servers, 277
 Dynamic Host Configuration Protocol (DHCP). *See* DHCP (Dynamic Host Configuration Protocol)
 dynamic IP addresses, 40

E

e-mail
 envelopes, 352
 headers, 352
 incoming mail, sendmail servers, 338
 outgoing mail, sendmail servers, 338
 overlapping addresses, handling, 363
 emulation
 Samba, PDCs (Primary Domain Controllers), 150
 VT100 dumb terminals, 581-582
 encapsulating security protocol (ESP), 583
 encryption
 LDAP (Lightweight Directory Access Protocol),
 configuring, 508-511
 Linux-WLAN, 197-199
 SSH encryption, 263-264
 SWAT, 154-158
 VPNs (virtual private networks), 583-584
 Wireless Tools, 191
 encryption keys, 189
 envelopes, e-mail, 352
 error log files, Apache, 335
 errors
 Ethernet errors, causes, 62
 installation, RPMs (Red Hat Package Manager) files, 115-117
 NICs, viewing, 61
 ESP (encapsulating security protocol), 583
 ESSIDs (Extended Service Set IDs), 189
 eth0 Ethernet port, 36
 Ethernet
 NIC errors, causes, 62
 ports, 36
 Ethernet cards, 25-27
 export nesting, NFS (Network File System), 476
 exporting directories, NFS (Network File System), 458
 Extended Service Set ID (ESSIDs), 189

F

failed dependencies, RPM installations, 115
 fast-input-queue chain (iptables), 219
 fast-output-queue chain (iptables), 219
 Fedora Core 1 startup errors, MySQL servers, 557-558
 Fedora Linux
 boot process, 121-125
 Red Hat Linux, compared, 9
 version differences, 617
 DHCP, 618
 DNS, 618
 FTP, 617

- iptables, 619
- MRTG, 621-622
- routing, 619
- software installation, 619
- Webalizer, 622
- wireless networking, 620
- WLAN file locations, 620
- FIFO errors, NICs (Network Interface Cards), 62
- file formats, network scripts, 38
- file locking, NFS (Network File System), 476
- file permissions, NFS (Network File System), 476
- File Transfer Protocol (FTP). *See* FTP (File Transfer Protocol)
- files
 - copying
 - Kickstart servers, 412
 - SCP (Secure Copy), 269-270
 - SFTP (Secure FTP), 271
 - formats, TCP Wrappers, 576
 - permissions, changing, 144
 - sendmail files, 613, 615
- filesystems
 - data storage disks, 457
 - directories, mounting, 457
 - NFS (Network File System)
 - access limitations, 476
 - automounter, 468-472
 - configuring, 462-468
 - daemons, 460
 - export nesting, 476
 - file locking, 476
 - file permissions, 476
 - hanging, 475-476
 - installing, 461-462
 - root access limitations, 476
 - rules, 458
 - security, 475
 - troubleshooting, 472-474
 - VFS (virtual filesystem), 458-460
 - pointers, 458
- filter table (iptables), 212
- firewalls, 31, 209
 - bridging mode firewalls, proxy ARPs, 53
 - FTP (File Transfer Protocol), conflicts, 240-242
 - ipchains, 210
 - iptables, 66, 209-210
 - command switch operations, 216-219
 - connectivity issues, 71
 - creation of, 210
 - downloading, 211
 - firewall logs, 234-235
 - installing, 211
 - kernel modules, 222
 - lokkit rule generator, 220
 - packet jumps, 215
 - packet processing, 211-214
 - packet targets, 215
 - scripts, 220-233
 - starting, 211, 236
- status checks, 211
- troubleshooting, 234-236
- user-defines chains, 219
- NAT firewalls
 - Apache, 329-330
 - dynamic DNS, 307
- NTP servers, 407
- OIDs (object identifiers), 365-368
- PIX firewalls, Syslog numbering scheme, 624-625
- Samba, 180-181
- SOHO firewalls, dynamic DNS, 307
- syslog, 96
- VPNs (virtual private networks), 586
- Flags field (TCP headers), 588
- formats
 - files, TCP Wrappers, 576
 - packets, TCP/IP, 587-588
- formatting RAID sets, 431
- forward lookups (A) resource record (DNS), 284-287
- forward zone files (DNS), 287-288
- forwarding, packet forwarding, enabling, 52-53
- FQDNs (fully qualified domain names), 278-279
- Fragment Offset field (IP headers), 587
- Fragment Reassembly Time Exceeded ICMP code, 590
- Fragmentation Needed and Don't Fragment Was Set ICMP code, 589
- frames, errors, NICs (Network Interface Cards), 62
- free utility, 382-383
- FreeRADIUS servers, LDAP, configuring for, 517-522
- FTP (File Transfer Protocol), 32, 237
 - active FTP, 32, 238-239
 - anonymous FTP, 32, 238, 240
 - commands, 105
 - connection channels, 237
 - Fedora Linux, version differences, 617
 - firewalls, conflicts, 240-242
 - passive FTP, 32, 238-239
 - regular FTP, 32, 238-239
 - RPMs (Red Hat Package Manager) files, downloading from, 103-106
 - SCP (Secure Copy), compared, 269-270
 - SFTP (Secure FTP), compared, 271
- FTP servers
 - configuring, 414
 - login sessions, conducting, 248-249
 - read-only access, creating, 247-248
 - security issues, 245-246
 - troubleshooting, 246
- full duplex data paths, 25-26
- fully qualified domain names (FQDNs), 278-279

G

- gateways
 - default gateways, 31
 - changing, 46
 - routers, compared, 30
 - two gateways, configuring, 47-48

gauge values (MRTG), 387
 global variables (MRTG), defining, 395
 [global] section (smb.conf file), 158-159
 grace periods, disk quotas, editing, 454
 graphing router statistics, MRTG (Multi-Router Traffic Grapher), 373-380
 graphs, MRTG (Multi-Router Traffic Grapher), viewing, 378
 group quotas, editing, 455
 group shares, Samba, creating in, 174-175
 grouping IP addresses into networks, 21-24
 groups
 domain groups, Samba, 168
 users, assigning to, 143
 GRUB MBR boot loader, 121-122
 Grub splash screen, single-user mode, entering, 128
 GUI consoles, 124-125

H

half duplex data paths, 25-26
 hangings, 67
 NFS (Network File System), 475-476
 hard disks
 adding, 435-442
 directories, mounting, 457
 file systems, 457
 names, conventions, 436
 NFS (Network File System)
 access limitations, 476
 automounter, 468-472
 configuring, 462-468
 daemons, 460
 export nesting, 476
 file locking, 476
 file permissions, 476
 hanging, 475-476
 installing, 461-462
 root access limitations, 476
 rules, 458
 security, 475
 troubleshooting, 472-474
 VFS (virtual file system), 458-460
 partitions
 data migration, 440-442
 deleting, 438
 directory structure, 439-440
 LVM (Logical Volume Manager), 442-449
 preparing, 437-439
 primary partitions, 438
 verifying, 439
 types, determining, 436
 hard mounts, NFS (Network File System), 459
 hardware-based RAID disk controllers, 424
 hashed message authentication code (HMAC), 584
 Header checksum field (IP headers), 588
 headers
 e-mail, 352
 IP headers, 587
 IP packets, 13

port values, 14
 TCP headers, 588
 UDP headers, 588
 headless system operations, 579-580
 help files, 32-33
 DDclient, 310
 HMAC (hashed message authentication code), 584
 home networking
 topologies, 4
 iptables, access, 229
 [homes] section (smb.conf file), 160
 hops (routers), 30
 Host Precedence Violation ICMP code, 589
 Host Unreachable ICMP code, 589
 hosting
 dedicated hosting, 5-6
 in-house Web hosting, 6-8
 migration to, 8
 servers, 8-10
 virtual hosting, 4-5
 hot standby (RAID 1), 423
 HTTP connectivity, Apache, testing, 332
 HTTP update sites, yum automatic RPM update program, 109
 hubs, 28-29

I

IANA (Internet Assigned Numbers Authority), 500
 ICMP (Internet Control Message Protocol)
 codes, 588-590
 match criteria, packets, 217
 TCP/IP (Transmission Control Protocol/Internet Protocol), 16
 icmp-queue-in chain (iptables), 219
 icmp-queue-out chain (iptables), 219
 IDE drives, software-based RAID disk controllers, 424
 IHL field (IP headers), 587
 IKE (Internet Key Exchange), VPNs (virtual private networks), 584-585
 IKE-XAUTH secured RADIUS, 586
 imap, 362-363
 in-house Web hosting, 6-8
 in-house Web sites, migration, 298-299
 incoming mail, handling, sendmail servers, 338
 indirect maps (NFS automounter), 469-470
 initial synchronizations, NTP (Network Transfer Protocol), performing, 403-404
 initialization
 iptables, basic initialization, 225
 NIS domains, 485
 RAID, 431
 INPUT chain (iptables), 219
 installation
 Apache, 313
 BIND (Berkeley Internet Name Domain) Project, 279
 DHCP servers, 135-137
 dynamic DNS clients, 306

- FreeRADIUS, 518
- iptables, 211
- kernel modules, 543
- kernel source RPM package, 534
- Kickstart servers, automating, 417
- LDAP (Lightweight Directory Access Protocol), 501
- Linux, network installation, 416-420
- MRTG (Multi-Router Traffic Grapher), 374
- MySQL servers, 548
- NFS (Network File System), 461-462
- NTP (Network Time Protocol), 402
- Openswan RPM, status checks, 562-563
- POP mail servers, 362
- RPMs (Red Hat Package Manager) files, 113-117
- Samba, 150
- sendmail, 340
- software, tar command, 119-120
- source RPMs, 114-115
- TELNET servers, 253
- TFTP servers, 257
- VSFTPD, 242
- installation CDs, kernel RPMs, 533
- installation servers, configuring, 412-416
- integer values, tracking, MIBs, 386
- interconnecting LAN (local area networks) routers, 29
- interfaces
 - activated interfaces, viewing, 59
 - aliases, 39
 - loopback interface, localhost entries, 55-56
 - shutting down, aliases, 39
 - viewing, 59
 - wlan:0, 39
- International Organization for Standardization, OSI (Open System Interconnection) model, 12
- Internet Assigned Numbers Authority (IANA), 500
- Internet Protocol (IP). *See IP (Internet Protocol)*
- interrupt (IRQ) values, 202
- interrupt conflicts, WLANs, checking for, 202-203
- IP (Internet Protocol), 13
 - aliases, creating, 39
 - IPv6 (IP version 6), 21
 - network devices, accessing, 17-21
 - packets, 13
- IP addresses
 - Apache, configuring for, 323-327
 - APIPA (Automatic Private IP Addressing), 140
 - assigning, 135
 - cable modem connections, 45
 - DSL connections, 40-43
 - assignment automation, 19-20
 - changing, 37-38
 - checking, nslookup command, 85
 - determining, 36-37
 - dynamic IP addresses, 40
 - grouping into networks, 21-24
 - localhost IP address, 18
 - mapping MAC addresses to, 26-27
 - NIC cards, configuring on, 36-46
- private IP addresses, 17
- publicizing, 18-19
- ranges calculations, 22-23
- static IP addresses, 40
- Web domain linking, 20
- IP forwarding, configuring, 52-53
- IP headers, 587
- IP masquerading, 18-19
- IP packets, TTL (Time to Live) sections, 16
- IP Version field (IP headers), 587
- IP-based virtual hosting, Apache, 321-322
- ipchains, 210
- IPSec, VPNs (virtual private networks), 583
- iptables, 209-210
 - chains, user-defines chains, 219
 - creation of, 210
 - DNS access, permitting, 227
 - downloading, 211
 - Fedora Linux, version differences, 619
 - firewall, 66, 71
 - firewall logs, checking, 234-235
 - home network access, permitting, 229
 - initialization, basic initialization, 225
 - installing, 211
 - Internet access, permitting, 228
 - kernel modules, loading, 222
 - log files, ICMP codes, 588, 590
 - lokkit rule generator, 220
 - many to one NAT, 229-230
 - operating systems, defending, 223-224
 - packets
 - command switch operations, 216-219
 - ICMP (Ping) match criteria, 217
 - jumps, 215
 - multiport match criteria, 218
 - processing, 211-214
 - targets, 215
 - TCP match criteria, 217
 - UDP match criteria, 217
 - port forwarding type NAT, 230
 - Samba servers, 180-181
 - scripts, 598-600
 - lost scripts, 221-222
 - sample script, 222-233
 - saving, 220
 - SSH (secure shell) access, permitting, 227
 - starting, 211, 236
 - static NAT, 232
 - status, checking, 211
 - tables, 211
 - filter table, 212
 - nat table, 212
 - troubleshooting, 234-236
 - WWW access, permitting, 227
 - ISO files, creating, mkisofs command, 414
 - ISPs (Internet service providers)
 - connectivity, testing, 304-305
 - dedicated hosting providers, 5-6
 - in-house Web hosting, migration, 8
 - virtual hosting providers, 4-5

J-K

kernel, 533

- boot CDs, creating, 544-545
- configuring, 540-541
- crash recoveries, 544
- custom kernels
 - compiling, 542
 - copying to /boot partition, 543
 - creating, 539-543
- /etc/grub.conf files, updating, 544-545
- installation CDs, 533
- iptables, loading, 222
- kernel source RPM package, 534
- log errors, WLANs, 203
- Makefile, editing, 542
- modules, 535-536
 - building, 542
 - installing, 543
 - loading, 536-537
 - loading on demand, 537-538
- parameters, tuning, 577-579
- updating, 545
- upgrades, 534

keys

- encryption keys, 189
- IKE (Internet Key Exchange), VPNs (virtual private networks), 584-585
- signature keys, RPM installations, 116-117

Kickstart servers, 411

- configuring, 412-416
- installation, automating, 417

L

labeling cables, 8

LAM (LDAP Account Manager), 517

LANs (local area networks), 29

- daisy chaining, 29
- routers, 29
- VLANs (Virtual LANs), 29
- WLANs (Wireless LANs), 187-191

layers (OSI), 12

- Layer 1 (Physical), 12-13, 24-25
- Layer 2 (Link), 12-13, 24-25
- Layer 3 (Network), 12-13
- Layer 4 (Transport), 12-13
- Layer 5 (Session), 12
- Layer 6 (Presentation), 12
- Layer 7 (Application), 12

LDAP (Lightweight Directory Access Protocol), 499

- administrative tasks, 514-517
- bind errors, 513
- configuring, 501-507
- database directories
 - creating, 501
 - testing, 505
- DCs (domain components), 500
- directories, 500
- downloading, 501

encrypted communication, configuring, 508-511

installing, 501

LAM (LDAP Account Manager), 517

LDIF (LDAP Data Interchange Files) format, 503-505

logins, troubleshooting, 511-514

passwords, changing, 514

RADIUS, configuring for, 517-522

root passwords, creating, 502

starting, 514

stopping, 514

users

adding, 516

deleting, 517

modifying, 515

LDIF (LDAP Interchange Files) format, 503-505

leaves (SMI trees), 365

legend parameters (MRTG), 390

length errors, NICs (Network Interface Cards), 62

Length field (UDP headers), 588

Lightweight Directory Access Protocol (LDAP). *See* LDAP (Lightweight Directory Access Protocol)

Linear RAID, 421

Link Layer (OSI), 12, 24-25

link lights, NICs (network interface cards), 25

linking IP addresses to Web domains, 20

links, testing, 58-60

Linksys WMP11 wireless cards, 188

Linux

Fedora Core 3, 575

Fedora Linux, 9

version differences, 617-622

headless system operations, 579-580

help files, 32-33

installing, network installation, 416-420

Red Hat Linux, 9

Linux Home Networking Web site, 3

Linux-WLAN, 188-192

configuring, 194-196

encryption, 197-199

RPMs, 192-194

starting, 196

testing, 196

listing associated files, RPMs (Red Hat Package Manager) files, 117-119

loading

DNS configuration files, 292

iptables kernel modules, 222

kernel modules, 536-537

on demand, 537-538

local area networks (LANs). *See* LANs (local area networks)

Local Director

configurations, saving to TFTP servers, 259

numbering scheme, 624

localhost entries, loopback interfaces, 55-56

localhost IP address, 18

log errors, WLANs, 203

- log files
 - analyzing, Webalizer, 380-381
 - Apache, 333-335
 - iptables, ICMP codes, 588-590
 - logrotate log files, compressing, 98-99
- LOG packet target (iptables), 215
- logging syslog messages to remote servers, 94-95
- Logical Volume Manager (LVM). *See* LVM (Logical Volume Manager)
- logins
 - FTP servers, 248-249
 - LDAP
 - directory structure, 500
 - troubleshooting, 511-514
 - NIS (Network Information Services), 483
 - client configuration, 488-491
 - configuring, 483-486
 - non-NFS environments, 497
 - passwords, 495-497
 - slave servers, 491-494
 - troubleshooting, 497-498
 - users, 487
- logrotate, 91, 96-99
- logs
 - iptables, checking, 234-235
 - Samba, checking, 186
 - syslog, real-time viewing, 93
- lokkit rule generator (iptables), 220
- loopback interfaces, 55-56, 343
- lost scripts, iptables, recovering from, 221-222
- LVM (Logical Volume Manager), 435, 442-449
 - configuring, 443-449
 - logical volumes, 443
 - partition types, determining, 444
 - PEs (physical extents), 443
 - PV (physical volume), 442
 - VG (volume group), 443
- M**
- MAC (media access control) addresses, 26-27
 - IP addresses, mapping to, 26-27
 - viewing, 62-63
- machine trust accounts, Samba workstations, creating for, 163-164
- macros, sendmail servers, 338-339
- mail (MX) resource record (DNS), 284-287
- mail servers
 - POP servers
 - configuring, 362-363
 - installing, 362
 - starting, 362
 - troubleshooting, 363
 - sendmail servers, 337-357
 - client configuration, 343
 - client conversions, 343-345
 - DNS configuration, 342-343
- incoming mail, 338
- installing, 340
- macros, 338-339
- masquerading, 350-352
- outgoing mail, 338
- restarting, 340-341
- sender address changes, 352-353
- spam, 358-362
- starting, 340
- troubleshooting, 353-357
- Makefile, editing, 542
- managed applications, xinetd, controlling, 252
- Management Information Bases (MIBs). *See* MIBs (Management Information Bases)
- mangle table (iptables), 211
- manual installations, RPMs (Red Hat Package Manager) files, 113-117
- many-to-one NAT (network address translation), 18, 229-230
- map files
 - NFS, 468
 - NFS automounter, 468
 - direct maps, 469
 - indirect maps, 469-470
 - wildcards, 471
- mapping
 - localhost entries, 56
 - MAC (media access control) addresses to IP addresses, 26-27
- MASQUERADE packet target (iptables), 216
- masquerading
 - iptables, 229-230
 - sendmail, 350-352
- MBR (master boot record), 121-122
- media access control (MAC) addresses. *See* MAC (media access control) addresses
- memory, monitoring, MIBs, 388
- MF Bit field (IP headers), 587
- MIBs (Management Information Bases), 365-368
 - CPUs, monitoring, 388
 - memory, monitoring, 388
 - MRTG, compared, 387
 - objects, 386
 - OIDs, 386, 399
 - TCP/IP, monitoring, 388
 - values
 - counter values, 386
 - integer values, 386
 - non-linux monitoring, 398-399
 - testing, 387
 - viewing, 385-387
- Microsoft Active Directory Service, 499
- migration
 - data migration, hard disk partitions, 440-442
 - in-house Web sites, 298-299
- Missing a Required Option ICMP code, 590
- modem cables. *See* straight-through cables

- modules
 - iptables, loading, 222
 - kernel, 535-536
 - building, 542
 - installing, 543
 - loading, 536-537
 - loading on demand, 537-538
- monitoring
 - servers
 - MRTG, 395, 397-398
 - SNMP (Simple Network Management Protocol), 365-373
 - values, MIBs, 398-399
 - monitors, foregoing, headless system operations, 579-580
- mounting
 - automating, Samba clients, 178
 - NFS (Network File System), 459
 - mounting directories, hard disks, 457
- MRTG (Multi-Router Traffic Grapher), 373, 385
 - advanced server monitoring, 395-398
 - Apache, configuring for, 377-378
 - configuring, 375-377
 - manually configuring, 389-395
 - Detailed View page, 389
 - downloading, 374
 - Fedora/Red Hat Linux, version differences, 621-622
 - global variables, defining, 395
 - graphs, viewing, 378
 - installing, 374
 - MIBs, 387
 - multiple devices, polling, 377
 - parameter formats, 389-392
 - subsystems, monitoring, 378
 - Summary View page, 389
 - troubleshooting, 379-380, 400
 - Web pages, 374
- Multi-Router Traffic Grapher (MRTG). *See* MRTG (Multi-Router Traffic Grapher)
- multiple collisions, NICs (Network Interface Cards), 62
- multiple gateways, configuring, 47-48
- multiple IP addresses, single NIC card, 39
- multiport match criteria, packets, iptables, 218
- MX (mail) resource records (DNS), 286-287
- MySQL servers, 547
 - CLI (command line interpreter), 550
 - data tables, 552-553
 - databases
 - backup, 555
 - configuring, 554
 - creating, 550-551
 - deleting, 550
 - network security, 556
 - preparing for, 548
 - restoration, 556
 - troubleshooting, 557-558
 - viewing, 552-554
- /etc/my.cnf file, 549
- Fedora Core 1 startup errors, 557-558
- installing, 548
- privileges, granting, 551-552
- root accounts, creating, 549
- root passwords, recovering and changing, 554
- starting, 549

N

- named virtual hosting, Apache, 320-321
- names
 - DNS, naming conventions, 301
 - domains
 - BIND (Berkeley Internet Name Domain) Project, 279-301
 - FQDNs (fully qualified domain names), 278
 - hard disk device names, conventions, 436
 - mail servers, configuring, 342
 - Web sites, checking, 85
- NAT (network address translation), 307
 - DNS, 289-290, 292
 - many to one NAT, iptables, 229-230
 - port forwarding type NAT, iptables, 230
 - post forwarding, 19
 - private IP addresses, publicizing, 18
 - static NAT, iptables, 232
- NAT firewalls
 - Apache, running behind, 329-330
 - dynamic DNS, conflicts, 307
- NAT routers, dynamic DNS, conflicts, 307
- nat table (iptables), 212
- NDS (Novell Directory Services), 499
- Net Unreachable ICMP code, 589
- Netfiler, iptables, creation of, 210
- netfs daemon (NFS), 461
- [netlogon] share section (smb.conf file), 161
- netmasks. *See* subnet masks
- network address translation (NAT). *See* NAT (network address translation)
- network devices
 - accessing, IP addresses, 17-21
 - syslog, 96
- Network File System (NFS). *See* NFS (Network File System)
- Network Information Services (NIS). *See* NIS (Network Information Services)
- network interface cards (NICs). *See* NICs (network interface cards)
- Network Layer (OSI), 12
- network scripts, file formats, 38
- Network Time Protocol (NTP). *See* NTP (Network Time Protocol)
- networks
 - congestion, detecting, 79
 - connectivity
 - iptables firewall, 71
 - testing, 64-78

- disconnections, causes, 58
- Linux, installing on, 416-420
- slow response times, causes, 58
- VPNs (virtual private networks), 583-587
- wireless networks
 - 802.11 standard, 187
 - business implementation, 205
 - default gateway pinging, 203
 - encryption keys, 189
 - ESSIDs (Extended Service Set IDs), 189
 - interrupt conflicts, 202-203
 - kernel log errors, 203
 - Linux-WLAN, 188-199
 - NIC status checks, 200-202
 - troubleshooting, 199-205
 - unknown device errors, 203
 - WAPs (wireless access points), 188
 - wireless Linux-compatible NICs, 188
 - Wireless Tools, 187-191
- NFS (Network File System), 457
 - access, limiting, 476
 - advantages of, 480
 - automounter
 - map files, 468-471
 - starting, 471-472
 - clients, configuring, 481-483
 - configuring, 462-467
 - daemons, 460
 - directories, exporting, 458
 - DNS, 464
 - export nesting, 476
 - file locking, 476
 - file permissions, 476
 - hanging, 475-476
 - installing, 461-462
 - map files, 468
 - modifications, activating, 467-468
 - mounting
 - automounter, 468-472
 - hard mounts, 459
 - soft mounts, 459
 - root access, limiting, 476
 - rules, 458
 - security, 475
 - servers, configuring, 480-481
 - troubleshooting, 472-474
 - versions, 460
- VFS (virtual filesystem), 458-460
 - background mounting, 459
 - caching, 459
 - stateless operation, 458
 - symbolic links, 459
- nfs daemon, 461
- nfslock daemon, 461
- NICs (network interface cards), 25-27
 - activated interfaces, viewing, 59
 - activating, 45
 - DHCP servers, multiple NICs, 138-139
 - duplex, changing, 49-51
 - duplex data paths, 25-26
 - errors, viewing, 61
 - Ethernet errors, causes, 62
 - interfaces, viewing, 59
 - IP addresses
 - configuring on, 36-46
 - multiple IP addresses, 39
 - link light, 25
 - link status, testing, 60
 - MAC (media access control) address, 26-27
 - packet flow, viewing, 79-85
 - shutting down, 45
 - speed, changing, 49-51
 - testing, 59-62
 - wireless Linux-compatible NICs, 188
- WLANs, status checks, 200-202
- NIS (Network Information Services), 479
 - clients, configuring, 488-491
 - domains, initializing, 485
 - non-NFS environments, 497
 - passwords, changing, 495-496
 - servers, configuring, 483-486
 - slave servers, 491-495
 - troubleshooting, 497-498
 - users, adding, 487
- Novell Directory Services (NDS). *See* NDS (Novell Directory Services)
- NTP (Network Time Protocol), 401
 - clients, configuring, 407
 - configuring, 402-403
 - initial synchronizations, performing, 403-404
 - installing, 402
 - servers, configuring, 406-407
 - sites, types, 401
 - starting, 403
 - testing, 403-406
 - troubleshooting, 405-406
- null modem cables. *See* crossover cables
- numbering scheme, Local Directors, 624
- O**
- OIDs (object identifiers), 365, 368
 - locating, 399
 - retrieving, 365-368
 - structure of management information (SMI) trees, 365
 - testing, 399
- on-demand loading, kernel modules, 537-538
- one-to-one NAT (network address translation), 18
- Open System Interconnection (OSI) model. *See* OSI (Open System Interconnection) model
- OpenSSH, 263
 - SCP (Secure Copy), 263, 269-273
 - SFTP (Secure FTP), 263, 271
 - SSH (Secure Shell), 263, 271-273
 - configuring, 265-266
 - encryption, 263-264
 - reinstallation failures, 268

- remote commands on demand, 269
- remote logins, 267-268
- TELNET deactivation, 268
- testing, 265
- starting, 265
- Openswan**
 - downloading, 561
 - installation status, 562-563
 - starting, 561
 - troubleshooting, 569-572
 - tunnel status, determining, 569-570
 - VPNs (Virtual Private Networks), 560-561
- operating systems**
 - defending, iptables, 223-224
 - in-house hosting, 9
- options parameters (MRTG), 390
- OSI (Open System Interconnection) model**, 12
 - layers, 12-13, 24-25
 - TCP/IP, 13-14
 - connection establishment, 14-15
 - ICMP (Internet Control Message Protocol), 16
 - IP address grouping, 21-24
 - network device access, 17-21
 - packets, 13
 - ports, 16
 - TTLs (Time to Live), 16
 - UDP (User Datagram Protocol), 15
 - outgoing mail, handling, sendmail servers, 338
 - OUTPUT chain (iptables), 219
 - overlapping e-mail addresses, handling, 363
 - overrun errors, NICs (Network Interface Cards), 62
 - ownership, files, changing, 144
- P**
 - packages, updating, 108
 - packet forwarding, servers, enabling, 52-53
 - packets (IP), 13
 - flow
 - viewing, 79-85
 - port values, 14
 - iptables, 215-219
 - processing, iptables, 211-214
 - TCP/IP, formats, 587-588
 - TTLs (Time to Live) sections, 16
 - parameters
 - kernel, tuning, 577-579
 - MRTG, 389-392
 - parameter problem codes (ICMP), 590
 - partitions
 - hard disks
 - data migration, 440-442
 - deleting, 438
 - directory structure, 439-440
 - LVM (Logical Volume Manager), 442-449
 - preparing, 437-439
 - primary partitions, 438
 - verifying, 439
- software-based RAID disk controllers, 426-430
- type determination, LVM (Logical Volume Manager), 444
- passive FTP, 32, 238-239
- password authentication, NCSA compliance, Squid Web caching proxy servers, 526
- passwords**
 - Apache, 330-331
 - changing, 142
 - disabling, 147
 - LDAP
 - changing, 514
 - creating, 502
 - MySQL databases, root passwords, 554
 - NIS (Network Information Services), changing, 495-496
 - root passwords, recovering, 128
 - Samba, 162
 - modifying, 169
 - yppasswd, 495-496
- PDCs (Primary Domain Controllers)**, 149
- Samba PDCs**
 - automated mounting, 178
 - domain groups, 168
 - emulation, 150
 - group shares, 174-175
 - passwords, 169
 - printers, 171-174
 - users, 166-168
 - Windows drives shares, 175-178
- Samba servers**
 - administrator users, 162-163
 - configuring as, 158-162
 - workstations, 163-166
- Windows Workgroup members**, compared, 149
- PERL** programming language, spam, stopping, 361-362
- permissions**
 - Apache, 316
 - changing, 144
 - full access permissions, granting, 146
 - limited access permissions, granting, 146-147
 - NFS (Network File System), 476
 - passwords, disabling, 147
 - read-only access, FTP servers, 247-248
- PEs (physical extents)**, LVM (Logical Volume Manager), 443
- Physical Layer (OSI)**, 12, 24-25
- pinging, 64-65
 - default gateways, WLANs, 203
- PIX firewalls**
 - configurations, saving to TFTP servers, 258
 - syslog numbering scheme, 624-625
- Pointer indicates the error ICMP code, 590
- pointers, filesystems, 458
- polling devices, MRTG (Multi-Router Traffic Grapher), 377
- POP mail servers, configuring, 362-363

- port forwarding, 307
 port forwarding type NAT, iptables, 230
 Port Unreachable ICMP code, 589
 port values (packet headers), 14
 portmap daemon (NFS), 460
 ports
 TCP (Transmission Control Protocol), 16
 TCP/IP ports, checking, 87-88
 UDP (User Datagram Protocol), 15
 post forwarding, NAT (network address translation), 19
 post installation commands, 418
 pre-shared keys (PSK). *See* PSK (pre-shared keys)
 Presentation Layer (OSI), 12
 Primary Domain Controller (PDCs). *See* PDCs
 (Primary Domain Controllers)
 primary partitions, hard disks, 438
 printer configuration screen, 172
 printers, Samba PDCs, adding to, 171-174
 [printers] share section (smb.conf file), 161
 private IP addresses, 17
 publicizing, 18-19
 privileges, granting, MySQL servers, 551-552
 [profiles] share section (smb.conf file), 161
 Protocol field (IP headers), 587
 Protocol Unreachable ICMP code, 589
 protocols
 ARP (Address Resolution Protocol), MAC address mapping, 26-27
 ESP (encapsulating security protocol), VPNs (virtual private networks), 583
 FTP (File Transfer Protocol), 32, 237-240
 IP (Internet Protocol), 13-20
 LDAP (Lightweight Directory Access Protocol), 499
 NFS (Network File System), 457
 NTP (Network Time Protocol), 401
 SMTP (Simple Mail Transport Protocol), 338
 TCP (Transmission Control Protocol), 14-16
 TCP/IP (Transmission Control Protocol/Internet Protocol), 13-24
 UDP (User Datagram Protocol), 14-15
 proxy ARP, 53-54
 PSK (pre-shared keys), VPNs, configuring, 568-569
 PTR (reverse lookups) resource records (DNS), 286-287
 public encrypted keys, VPNs (virtual private networks), 584
 public IP addresses, 18-19
 public spam blacklists, sendmail, 358
 purpose-built Web servers, 8
 PV (physical volume), LVM (Logical Volume Manager), 442
- Q-R**
- queries, SNMP queries, performing, 369-373
 querying DNS servers, nslookup command, 86
 queues (iptables), 211-212
- quota reports, disk quotas, getting, 455
 quotas, disk quotas, 451-454
- RADIUS, LDAP (Lightweight Directory Access Protocol), configuring for, 517-522
- RAID (redundant arrays of inexpensive disks), 421-425
 hardware-based RAID disk controllers, 424
 Linear RAID, 421
 software-based RAID disk controllers, 424
 configuring, 427-434
 IDE drives, 424
 initialization, 431
 partitioning, 427-430
 partitions, 426
 SCSI drives, 425-426
 serial ATA drives, 425
 set creation, 431
 set formatting, 431
 sets, 432
 single-user mode, 426
 system backups, 426
- RAM, determining, free utility, 382
- ranges, addresses, calculating, 22-23
- read ahead caches, 459
- read-only access, FTP servers, creating, 247-248
- rebooting process, 125-128
- Red Hat Linux
 Fedora Linux, compared, 9
 version differences, 621-622
- redirect codes (ICMP), 590
- Redirect Datagram for the Host ICMP code, 590
- Redirect Datagram for the Network (or subnet) ICMP code, 590
- Redirect Datagram for the Type of Service and Host ICMP code, 590
- Redirect Datagram for Type of the Service and Network ICMP code, 590
- redundant arrays of inexpensive disks (RAID). *See* RAID (redundant arrays of inexpensive disks)
- Register.com, 5
- RegisterFree.com, 5
- registration
 domains, 277, 293
 dynamic DNS, 305-306
- regular DNS servers, configuring, 282-293
- regular FTP, 32, 238-239
- reinstallation failures, SSH (Secure Shell), 268
- REJECT packet target (iptables), 215
- Remote Authentication Dial-in User Service (RADIUS). *See* RADIUS (Remote Authentication Dial-in User Service)
- remote logins, SSH (Secure Shell), 267-269
- remote procedure calls (RPCs), clients, 459
- remote servers
 slow response times, causes, 58
 syslog messages, logging to, 94-95
 TCP/IP ports, checking, 87-88
- reports, disk quotas, getting, 455

resource records (DNS), 284-288
response times, slow response times, causes, 58
restarting sendmail, 340-341
restoration, MySQL databases, 556
return code symbols, traceroute messages, 72
reverse lookups (PTR) resource record (DNS), 284-287
reverse zone files (DNS), 288-289
root access, limiting, NFS (Network File System), 476
root accounts, 144
MySQL servers, creating, 549
root authoritative DNS servers, 276
root directories, 499
root nodes (SMI trees), 365
root passwords
 LDAP, creating, 502
 MySQL servers, recovering and changing, 554
 recovery, 128
routers, 30
 configuration, 623
 restoring, 261-262
 saving to TFTP servers, 259
gateways, 30-31
hops, 30
LANs (local area networks), interconnecting, 29
monitoring, MRTG (Multi-Router Traffic Grapher), 373-380
NAT routers, dynamic DNS, 307
OIDs (object identifiers), 365-368
servers, converting into, 52-54
SOHO routers, dynamic DNS, 307
wireless routers, placement, 8
routers of last resort. *See* default gateways
routes
 servers, 47-49
 VPNs, checking, 571
routing, Fedora Linux, version differences, 619
routing tables, viewing, 45-46
RPCs (remote procedure calls), clients, 459
rpmfind.net, RPMs, downloading from, 103
RPMs
 anonymous FTP, downloading from, 104-106
Apache, 313
 Browser 403 Forbidden messages, 332
 configuring, 315-327, 331
 configuring for DNS, 314
 data compression, 327-328
 DHCP, 314
 downloading, 313
 error log files, 335
 file permissions, 316
 HTTP connectivity, 332
 installing, 313
 NAT firewalls, 329-330
 passwords, 330-331
 server name errors, 333
 starting, 314
 status log files, 333-334
 troubleshooting, 332-335
virtual hosting, 320-323
 Web page placement, 315-320
associated files, listing, 117-119
attaining, 102-107
automatically updating, yum automatic RPM update program, 107-113
BIND (Berkeley Internet Name Domain)
 Project, 279
 caching DNS name servers, 280-281
 configuring, 279-293
 file locations, 281
 regular DNS servers, 282-293
 starting, 279
 troubleshooting, 294-301
boot time, starting at, 119
compatibility, 103
DDclient, 307-310
DHCP package, 135-140
distribution CDs, installing from, 102
Fedora, downloading from, 102
identifying, Linux-WLAN, 192-193
imap, 362-363
installed RPMs, listing, 117
installing
 errors, 115-117
 Linux-WLAN, 193-194
iptables, 209-210
 command switch operations, 216-219
 downloading, 211
 firewall logs, 234-235
 installing, 211
 kernel modules, 222
 lokkit rule generator, 220
 packet jumps, 215
 packet processing, 211-214
 packet targets, 215
 scripts, 220-233
 starting, 211, 236
 status checks, 211
 troubleshooting, 234-236
 user-defined chains, 219
kernel source package, 534-538
kernel
 updating, 545
 upgrades, 534
LDAP (Lightweight Directory Access Protocol)
 configuring, 501-511
 downloading, 501
 installing, 501
 troubleshooting, 511-514
manually installing, 113-114
MRTG (Multi-Router Traffic Grapher), 373-380
NFS (Network File System)
 access limitations, 476
 autounmounter, 468-472
 configuring, 462-468
 export nesting, 476
 file locking, 476
 file permissions, 476
 hanging, 475-476

- installing, 461-462
 - root access limitations, 476
 - security, 475
 - troubleshooting, 472-474
- NTP (Network Time Protocol), 402-406
- rpmfind.net, downloading from, 103
- Samba
 - as PDC (Primary Domain Controller), 158-162
 - configuring, 151-158
 - domain groups, 168
 - installing, 150
 - passwords, 162, 169
 - PDC administrator users, 162-163
 - starting, 151
 - users, 166-168
 - workstations, 163-166
 - sendmail
 - configuring, 337-357
 - installing, 340
 - masquerading, 350-352
 - restarting, 340-341
 - sender address changes, 352-353
 - spam, 358-359, 361-362
 - starting, 340
 - troubleshooting, 353-357
 - source RPMs, 101
 - installing, 114-115
 - sudo, 144-148
 - TELNET, 252-256
 - uninstalling, 119
 - VSFTPD (Very Secured FTP Daemon), 237-248
 - Web-based FTP, downloading from, 103-104
 - Webalizer, 380-381
 - wget command, downloading with, 107
 - xinetd, 251-252
 - RSA keys
 - obtaining, 564
 - VPNs, configuring, 563-567
 - rules
 - generating, iptables, 220
 - NFS (Network File System), 458
 - runlevels, 122-123
 - default runlevels
 - determining, 123-124
 - reverting to, 128
 - programs, running at, 129-133
 - S**
 - Samba, 149
 - configuring, 151-158
 - connectivity testing, 181-185
 - domain groups, 168
 - firewalls, 180-181
 - group shares, creating, 174-175
 - installing, 150
 - logs, checking, 186
 - mounting, automating, 178
 - networks, troubleshooting, 186
 - passwords, 162
 - modifying, 169
 - PDC administrator users, creating, 162-163
 - PDCs (Primary Domain Controllers)
 - Configuring as, 158-162
 - emulation, 150
 - printers, adding to, 171-174
 - security, 186
 - smb.conf file
 - editing, 150
 - testing, 179-180
 - starting, 151
 - users, 166-168
 - Windows drives, sharing, 175-178
 - workstations, adding to, 163-166
 - SAAs (security associations), IKE (Internet Key Exchange), 585
 - saving iptables scripts, 220
 - scaling parameters (MRTG), 391
 - SCP (Secure Copy), 263, 269-270
 - passwords, using without, 271-273
 - scripts
 - adsl-setup script, 43-44
 - Apache File Permissions script, 591
 - iptables, 598-600
 - basic initialization, 225
 - DNS access, 227
 - home network access, 229
 - Internet access, 228
 - lost scripts, 221-222
 - many to one NAT, 229-230
 - operating system defense, 223-224
 - port forwarding type NAT, 230
 - sample script, 222-233
 - saving, 220
 - SSH (secure shell) access, 227
 - static NAT, 232
 - WWW access, 227
 - MySQL scripts, data table creation, 552
 - network scripts, file formats, 38
 - Sendmail Spam Filter script, 592-593
 - SCSI drives, software-based RAID disk controllers, 425-426
 - second stage boot loaders, 122
 - Secure Copy (SCP). *See* SCP (Secure Copy)
 - Secure FTP (SFTP). *See* SFTP (Secure FTP)
 - Secure Shell (SSH). *See* SSH (Secure Shell)
 - security
 - AH (authentication header), VPNs (virtual private networks), 583
 - attacks, source determination, 88
 - authentication
 - RADIUS (Remote Authentication Dial-in User Service), 499
 - VPNs (virtual private networks), 583-587
 - chroot jails, 281
 - DNS, 299-301

encryption
 LDAP (Lightweight Directory Access Protocol), 508-511
 Linux-WLAN, 197-199
 public encrypted keys, 584
 SSH encryption, 263-264
 SWAT, 154-158
 VPNs (virtual private networks), 583-584
 Wireless Tools, 191
ESP (encapsulating security protocol), VPNs (virtual private networks), 583
firewalls, 31, 209
 FTP (File Transfer Protocol), 240-242
 ipchains, 210
 iptables, 180-181, 209-236
 NTP server, 407
 syslog, 96
 Windows XP built-in, 181
 Zone Alarm, 181
FTP servers, 245-246
importance of, 209
IPSec, VPNs (virtual private networks), 583
MySQL servers, 556
NFS (Network File System), 475
Samba, 186
SAs (security associations), IKE (Internet Key Exchange), 585
SNMP (Simple Network Management Protocol), 371, 373
TCP Wrappers, 576-577
TELNET servers, 254-256
users, tracing, 89
VPNs (virtual private networks), 586
security associations (SAs). *See* SAs (security associations)
security contexts
 CGIs (Common Gateway Interfaces), 318-320
 disabling, 320
 SELinux, 317
 Web sites, 317-318
segmentation fault errors, 496
SELinux, security contexts, 317
sendmail, 337, 613-615
 clients, 343-345
 configuring, 337-357
 DNS, configuring for, 342-343
 incoming mail, handling, 338
 installing, 340
 macros, 338-339
 masquerading, 350-352
 outgoing mail, handling, 338
 reactivating, 130
 restarting, 340-341
 sender addresses, changing, 352-353
 spam, combating, 358-362
 starting, 340
 startup, switching off, 129
 troubleshooting, 353-357
Sendmail Spam Filter script, 592-593
Sequence Number field (TCP headers), 588
serial ATA drives, software-based RAID disk controllers, 425
ServerName directive, Apache, 333
servername statement, 315
servers
 Apache servers
 configuration, 315-327, 331
 configuring for DNS, 314
 data compression, 327-328
 DHCP, 314
 file permissions, 316
 NAT firewalls, 329-330
 passwords, 330-331
 Web site placement, 315-320
 cables, 8
 configuring, 35, 45-54
 /etc/hosts files, 54-55
 IP addresses, 36-46
 NIC cards, 45
 connectivity, iptables firewall, 71
 dedicated areas for, 8
 DHCP servers
 client configuration, 139
 configuring, 416
 installing, 135-137
 multiple NICs, 138-139
 starting, 138
 troubleshooting, 139-140
 disks, adding, 435-442
 DNS servers
 authoritative DNS servers, 276
 caching DNS name servers, 276-281
 DHCP, 39
 dynamic DNS servers, 277
 regular DNS servers, 282-293
 root authoritative DNS servers, 276
 static DNS servers, 277
 firewalls, FTP (File Transfer Protocol), 241-242
 FreeRADIUS servers, LDAP configuration, 517-522
 FTP servers
 configuring, 414
 login sessions, 248-249
 read-only access, 247-248
 security issues, 245-246
 troubleshooting, 246
 in-house Web hosting, 8, 10
 installation servers, configuring, 412-416
 Kickstart servers, 412-417
 LDAP servers
 configuring, 501-505
 troubleshooting, 511-514
 log files, analyzing, 380-381
 monitoring
 free utility, 382
 MIBs, 388
 MRTG (Multi-Router Traffic Grapher), 373-380, 395-398

SNMP (Simple Network Management Protocol), 365-373
 top command, 381
 Webalizer, 380-381
MySQL servers, 547
 CLI (command line interpreter), 550
 data tables, 552-553
 databases, 548-556
 /etc/my.cnf file, 549
 installing, 548
 network security, 556
 privileges, 551-552
 root accounts, 549
 root passwords, 554
 starting, 549
 troubleshooting, 557-558
NFS servers
 access limitations, 476
 configuring, 415, 462-463, 480-481
NIS servers
 configuring, 483-486
 non-NFS environments, 497
 troubleshooting, 497-498
 users, 487
NTP servers
 Cisco device configuration, 406-407
 firewalls, 407
OIDs (object identifiers), retrieving, 365-368
packet forwarding, enabling, 52-53
POP mail servers, 362-363
proxy ARP, 53-54
purpose-built Web servers, 8
remote servers, TCP/IP ports, 87-88
routers, converting into, 52-54
routes, 47-49
Samba servers
 as PDC (Primary Domain Controller), 158-162
 automated mounting, 178
 configuring, 151-158
 connectivity, 181-185
 domain groups, 168
 firewalls, 180-181
 group shares, 174-175
 installing, 150
 logs, 186
 network troubleshooting, 186
 passwords, 162, 169
 PDC administrator users, 162-163
 printers, 171-174
 security, 186
 smb.conf file tests, 179
 starting, 151
 users, 166-168
 Windows drives shares, 175-178
 Windows XP Built-in, 181
 workstations, 163-166
sendmail servers, 337-357
 client configuration, 343
 client conversions, 343-345
 DNS configuration, 342-343
 incoming mail, 338
 installing, 340
 macros, 338-339
 masquerading, 350-352
 outgoing mail, 338
 restarting, 340-341
 sender address changes, 352-353
 spam, 358-362
 starting, 340
 troubleshooting, 353-357
slave servers, NIS (Network Information Services), 491-495
slow response times, causes, 58
Squid Web caching proxy servers, 523
 configuring, 524-530
 downloading, 524
 hostname assignment, 524
 starting, 524
 troubleshooting, 530
syslog servers, configuring, 94-95
TELNET servers, 252-256
TFTP servers
 Cisco configurations, 258-261
 configuring, 257-258
 installing, 257
 router configurations, 261-262
Web servers, configuring, 414
 yum automatic RPM update program servers, creating, 109-110
Session Layer (OSI), 12
sets (RAID), 431-432
SFTP (Secure FTP), 263, 271
shared encryption key, 189
shared private keys, VPNs (virtual private networks), 585
shares, creating in Samba, 174-178
shutting down
 interfaces, aliases, 39
 NICs, 45
signature keys, RPM installations, 116-117
Simple Mail Transport Protocol (SMTP), 338
single collisions, NICs (Network Interface Cards), 62
single-user mode, 451
 disk quotas, 451
 entering, 127-128
 quitting, 452
 software-based RAID disk controllers, configuring in, 426
slave servers, NIS (Network Information Services), 491-495
slow response times
 cables, testing, 58
 causes, 58
 connectivity, testing, 64-68
 links, testing, 58
 MAC addresses, viewing, 62-63
 NICs (Network Interface Cards), testing, 59-62
 Web sites, testing, 68-69

- Small Office/Home Office (SOHO) environments, 11
smb.conf file, testing, 179-180
smbmount command, 177
SMI (structure of management information) trees, 365
OIDs (object identifiers), 365
SMTP (Simple Mail Transport Protocol), 338
SNAT packet target (iptables), 215
SNMP
 community strings, 368
 MIBs (Management Information Bases), 365-368, 385-387
 OIDs (object identifiers), retrieving, 365-368
 queries, performing, 369-371
 security, 371, 373
 servers, monitoring, 365-373
 troubleshooting, 373
 versions, 368
SOA (Start of Authority) resource records (DNS), 285-286
soft mounts, NFS (Network File System), 459
software
 installing, 119-120, 619
 RPMs
 anonymous FTP, 104-106
 associated file lists, 117-119
 attaining, 102-107
 automatically updating, 107-113
 boot time startups, 119
 compatibility, 103
 distribution CDs, 102
 Fedora, 102
 installation errors, 115-117
 installed RPM lists, 117
 manually installing, 113-114
 rpmfind.net, 103
 source RPMs, 114-115
 uninstalling, 119
 Web-based FTP, 103-104
 wget command, 107
software-based RAID disk controllers, 424
 configuring, 426-434
 IDE drives, 424
 initialization, confirming, 431
 partitioning, 426-430
 SCSI drives, 425-426
 serial ATA drives, 425
 sets, 431-432
 system backups, 426
SOHO (Small Office/Home Office) environments, 11
 dynamic DNS, 307
SOHO Linux VPNs, 559
 configuring
 PSK (pre-shared keys), 568-569
 RSA keys, 563-567
 iptables, possible changes to, 567
 Openswan, 560-561, 568-572
 downloading, 561
 installation status, 562-563
 starting, 561
 requirements, 560
SOHO routers
 dynamic DNS, 307
Source Address field (IP headers), 588
Source and Destination Port field
 TCP headers, 588
 UDP headers, 588
Source Host Isolated ICMP code, 589
Source Route Failed ICMP code, 589
source RPMs, 101
 installing, 114-115
spam, combating, sendmail, 358-362
spamassassin filter (sendmail), 359-361
speed, NICs, changing, 49-51
Squid Web caching proxy servers, 523
 configuring, 524-527
 ACLs (access control lists), 525
 disk usage, 530
 NCSA password authentication, 526
 transparent proxy configurations, 528-529
 troubleshooting, 530
 use force, 528-529
 Web access restrictions, 525-526
 downloading, 524
 hostnames, assigning, 524
 starting, 524
SSH (Secure Shell), 263
 configuring, 265-266
 encryption, 263-264
 iptables, access, 227
 passwords, using without, 271-273
 reinstallation failures, 268
 remote logins, 267-269
 TELNET, deactivating, 268
 testing, 265
SSL (secure socket layer), virtual hosting, Apache, 322-323
Start of Authority (SOA) resource record (DNS), 285-286
starting
 Apache, 314
 DDclient, 309
 DHCP servers, 138
 FreeRADIUS, 518
 iptables, 211, 236
 LDAP, 514
 Linux-WLAN, 196
 MySQL servers, 549
 NFS automounter, 471-472
 NTP (Network Transfer Protocol), 403
 Openswan RPM, 561
 POP mail servers, 362
 RPMs (Red Hat Package Manager) files, boot time, 119
 Samba, 151
 sendmail, 340
 Squid Web caching proxy servers, 524
 VSFTPD, 243
stateless operations, VFS (virtual filesystem), 458
statements, Web sites, 315
static DNS, 303

static DNS servers, 277
 static IP addresses, 40
 static NAT, iptables, 232
 static routes, 30
 status checks
 iptables, 211
 VSFTPD, 243
 status log files, Apache, 333-334
 storage, hard disks
 adding, 435-442
 directory mounting, 457
 filesystems, 457
 NFS (Network File System), 458-476
 straight-through cables, DCEs/DTEs,
 connecting, 28
 striping space (RAID 0), 422
 structure of management information (SMI) trees,
 OIDs (object identifiers), 365
 stunnel users, 508-511
 creating, SWAT, 154
 subnet masks, 21-24
 subsystems, monitoring, MRTG (Multi-Router
 Traffic Grapher), 378
 sudo utility, 144
 aliases, 147
 command tracking, syslog, 148
 full access, granting, 146
 installing, 145-148
 limited access, granting, 146-147
 passwords, disabling, 147
 visudo command, 145
 Summary View page (MRTG), 389
 super users, 141
 SWAT
 controlling, 154
 encrypting, 154-158
 Samba, configuring, 152-162
 Samba group shares, creating, 174
 setup, 152-153
 stunnel users, creating, 154
 switches, 29
 CAT switches, 623
 CATOS switches, saving configurations, 258
 daisy chaining, 29
 hubs, compared, 29
 symbolic links, NFS (Network File System), 459
 synchronization, system clocks, NTP (Network
 Time Protocol), 401-404
 syslog, 91-96
 clients, configuring, 95
 configuration, 96, 623-625
 /etc/syslog.conf file, 92-96
 change activation, 93
 configuring, 92
 firewalls, 96
 logs, real-time viewing, 93
 messages, logging to remote servers, 94-95
 servers, configuring, 94-95
 sudo commands, tracking, 148
 system messages, 92
 system backups, software-based RAID disk
 controllers, 426
 system clocks, synchronizing, NTP (Network Time
 Protocol), 401
 system messages, syslog, 92
 system shutdowns, performing, 125-126

T

tables (iptables), 211-212
 TAR files, 102
 target parameters (MRTG), 391-394
 TCP (Transmission Control Protocol), 14
 connection establishment, 14-15
 ports, 16
 TCP daemons, name determination, TCP
 Wrappers, 577
 TCP headers, 588
 TCP match criteria, packets, iptables, 217
 TCP ports, listening to, TELNET, 254
 TCP Wrappers, 576-577
 TCP/IP (Transmission Control Protocol/Internet
 Protocol), 13
 ICMP (Internet Control Message Protocol), 16
 IP addresses, 18-24
 IPv6 (IP version 6), 21
 monitoring, MIBs, 388
 network devices, accessing, 17-21
 packets
 formats, 587-588
 headers, 13
 TTLs (Time to Live), 16
 TCP/IP ports, checking, 87-88
 TELNET, 65-68, 252
 clients, 252
 configuring, 254
 deactivating, 254
 installing, 253
 security, 254-256
 SSH (Secure Shell), replacing with, 268
 TCP ports, listening to, 254
 temporary connections, authentication, VPNs
 (virtual private networks), 586-587
 terminals, DTEs (Data Terminal Equipment), 27-28
 testing
 Apache, HTTP connectivity, 332
 cabling, 58
 connectivity
 ping command, 64-68
 Samba, 181-185
 VPNs, 570
 DNS, 85-86
 dynamic DNS, 310
 FTP servers, login sessions, 248-249
 LDAP database directories, 505
 links, 58
 Linux-WLAN, 196
 MIB OIDs, 399
 MIB values, 387
 MySQL servers, connectivity, 557

NICs (Network Interface Cards), 59-62
 NTP (Network Transfer Protocol), 403-406
 RADIUS, 520-522
 smb.conf file, 179-180
 SSH (Secure Shell), 265
 Web sites, 68-69
 testparm (Samba), 179-180
 text terminals, attaining, GUI consoles, 125
 TFTP servers, 256
 Cisco configurations
 saving to, 258-259
 uploading from, 260-261
 configuring, 257-258
 installing, 257
 router configurations, restoring, 261-262
 time exceeded codes (ICMP), 590
 time to live (TTL) values, DNS zone files, 284
 Time to Live Exceeded in Transit ICMP code, 590
 timeouts, 67
 title parameters (MRTG), 391
 topologies, wireless home networking topology, 4
 Total Length field (IP headers), 587
 tracing users, 89
 tracking sudo commands, syslog, 148
 Transmission Control Protocol (TCP). *See TCP (Transmission Control Protocol)*
 Transmission Control Protocol/Internet Protocol (TCP/IP). *See TCP/IP (Transmission Control Protocol/Internet Protocol)*
 transparent proxy configuration, Squid Web caching proxy servers, 528-529
 transport adjacency, 583
 Transport Layer (OSI), 12
 transport mode VPNs, 583-584
 tree hierarchies (directories), 499
 troubleshooting
 Apache, 332-335
 cables, testing, 58
 connectivity, 70-78
 DHCP servers, 139-140
 DNS, 85-86
 FTP servers, 246
 iptables, 234-236
 LDAP logins, 511-514
 links, 58
 MRTG (Multi-Router Traffic Grapher), 379-380, 400
 MySQL servers, 557-558
 networks, Samba, 186
 NFS (Network File System), 472-474
 NICs (Network Interface Cards), 59-62
 NIS (Network Interface Protocol), 497-498
 NTP (Network Transfer Protocol), 405-406
 Openswan, 569-572
 packet flow, viewing, 79-85
 POP mail servers, 363
 RADIUS, 520-522
 sendmail, 353-357
 SNMP (Simple Network Management Protocol), 373

Squid Web caching proxy servers, 530
 WLANs, 199-205
 trust accounts, Samba workstations, creating for, 163-164
 TTL (time to live) values, DNS zone files, 284
 TTL (time to live) field (IP headers), 587
 TTL (time to live) packet sections, 16
 tunnel status, Openswan, determining, 569-570
 tunnels, VPNs (virtual private networks), 586
 type fields, IP packet headers, 14

U

UDP (User Datagram Protocol), 14-15
 headers, 588
 packets, iptables, 217
 uninstalling RPMs (Red Hat Package Manager) files, 119
 update sites, yum automatic RPM update program, 109
 updating
 kernels, 545
 packages, 108
 RPMs (Red Hat Manager Package) files, yum automatic RPM update program, 107-113
 upgrades, kernel, 534
 usage, disk quotas, 451-454
 User Datagram Protocol (UDP). *See UDP (User Datagram Protocol)*
 user privileges, granting, MySQL servers, 551-552
 user-defined chains, iptables, 219
 users
 adding, 141-144
 administrator users, PDCs (Primary Domain Controllers), 162-163
 deleting, 143
 directories, 499-501
 FTP users, creating, 415
 groups, assigning, 143
 LDAP, 515-517
 logins, LDAP (Lightweight Directory Access Protocol), 511-514
 NIS (Network Information Services), adding, 487
 passwords, changing, 142
 permissions, changing, 144
 read-only access, FTP servers, 247-248
 Samba domains, 166-168
 stunnel users, creating, 154
 sudo utility, 144-147
 super users, 141
 tracing, 89

V

values, MIBs, 386
 non-linux monitoring, 398-399
 testing, 387
 variables, yum configuration file, 109
 verification, hard disk partitions, 439
 Verisign, 5

VFS (virtual filesystem), 458-460
 VG (volume group), LVM (Logical Volume Manager), 443
 vi editor, MIBs, viewing, 386
 viewing
 activated interfaces, 59
 graphs, MRTG (Multi-Router Traffic Grapher), 378
 interfaces, 59
 MAC addresses, 62-63
 MIBs, 386
 MySQL databases, 552-554
 NIC errors, 61
 packet flow, 79-85
 routing tables, 45-46
 syslog logs, 93
 virtual filesystem (VFS). *See* VFS (virtual filesystem)
 virtual GUI consoles, 125
 virtual hosting, 4-5
 Apache, 320-323
 virtual LANs (VLANs), 29
 virtual loopback interfaces, localhost entries, 55-56
 VLANs (virtual LANs), 29
 VPNs (virtual private networks), 583-587
 AH (authentication header), 583
 authentication, 583-587
 configuring, 563-567
 connectivity, testing, 570
 encryption, 583-584
 ESP (encapsulating security protocol), 583
 firewalls, 586
 IKE (Internet Key Exchange), 584
 public encrypted keys, 584
 SAs (security associations), 585
 shared private keys, 585
 IPSec, 583
 iptables, possible changes to, 567
 Openswan RPM
 downloading, 561
 installation status, 562-563
 starting, 561
 startup rebooting, 568
 troubleshooting, 569-572
 requirements, 560
 routes, checking, 571
 transport mode VPNs, 583-584
 tunnels, 586
VSFTPD
 configuring, 243-245
 downloading, 242
 FTP
 login sessions, 248-249
 security issues, 245-246
 troubleshooting, 246
 installing, 242
 read-only access, creating, 247-248
 starting, 243
 status, testing, 243
 VT100 dumb terminals, emulating, 581-582

W
 WAPs (wireless access points), 188
 Web domains, IP addresses, linking to, 20
 Web hosting
 dedicated Web hosting, 5-6
 in-house Web hosting, 6-8
 migration to, 8
 servers, 8, 10
 virtual Web hosting, 4-5
 Web pages
 MRTG (Multi-Router Traffic Grapher), 374
 passwords, Apache, 330-331
 Web servers
 Apache servers
 configuration, 315-327, 331
 data compression, 327-328
 DHCP, 314
 DNS configuration, 314
 file permissions, 316
 NAT firewalls, 329-330
 passwords, 330-331
 Web page placement, 315-320
 cables, 8
 configuring, 35, 45-54, 414
 /etc/hosts files, 54-55
 IP addresses, 36-46
 NIC cards, 45
 dedicated areas for, 8
 packet forwarding, enabling, 52-53
 proxy ARP, 53-54
 purpose-built Web servers, 8
 routes, 47-49
 Squid Web caching proxy servers, 523-530
 Web sites, 3
 containers, 315
 Linux Home Networking Web site, 3
 migration, 298-299
 names, checking, 85
 placement, Apache servers, 315-320
 Register.com, 5
 RegisterFree.com, 5
 security contexts, 317-318
 statements, 315
 testing, 68-69
 Verisign, 5
 Webalizer, 380-381
 Fedora/Red Hat Linux, version differences, 622
 WEP (Wireless Encryption Protocol) keys, 197-199
 wildcards, NFS automounter map files, 471
 Window field (TCP headers), 588
 Windows clients, DHCP servers, configuring to
 use, 139
 Windows Domain, 587
 Windows drives, Samba, sharing, 175-178
 Windows Workgroup members, PDCs (Primary
 Domain Controllers), compared, 149
 Windows XP, built-in firewall, Samba servers, 181
 wireless access points (WAPs), 188
 Wireless Encryption Protocol (WEP) keys, 197-199

wireless Ethernet cards, 25-27
wireless home networking topology, 4
wireless networking
 802.11 standard, 187
 business implementation, 205
 default gateways, pinging, 203
 encryption keys, 189
 ESSIDs (Extended Service Set IDs), 189
 Fedora Linux, version differences, 620
 interrupt conflicts, checking for, 202-203
 kernel log errors, 203
 Linux-WLAN, 188, 191-192
 configuring, 194-196
 encryption, 197-199
 RPM identification, 192-193
 RPM installation, 193-194
 starting, 196
 testing, 196
 NICs, status checks, 200-202
 troubleshooting, 199-205
 unknown device errors, 203
 WAPs (wireless access points), 188
 wireless Linux-compatible NICs, 188
 Wireless Tools, 187, 189
 configuring, 189-190
 encryption, 191
 wireless routers, placement, 8
 Wireless Tools, 187-191
 wlan:0 interface, 39
WLANS (wireless LANs), 187
 business implementation, 205
 default gateways, pinging, 203
 encryption keys, 189
 ESSIDs (Extended Service Set IDs), 189
 File locations, 620
 interrupt conflicts, checking for, 202-203
 kernel log errors, 203
 Linux-WLAN, 188, 191-192
 configuring, 194-196
 encryption, 197-199
 RPM identification, 192-193
 RPM installation, 193-194
 starting, 196
 testing, 196
 NICs, status checks, 200-202
 troubleshooting, 199-205
 unknown device errors, 203
 WAPs (wireless access points), 188
 wireless Linux-compatible NICs, 188
 Wireless Tools, 187-191
WMP11 wireless cards (Linksys), 188
workstations, Samba domains, adding to, 163-166

X-Y-Z

X.500 standard, 499
xinetd, 251-252
Yellow Pages (NIS), 483
yum automatic RPM update program, 107-113

Wouldn't it be great

if the world's leading technical publishers joined forces to deliver their best tech books in a common digital reference platform?

They have. Introducing
InformIT Online Books
powered by Safari.



■ Specific answers to specific questions.

InformIT Online Books' powerful search engine gives you relevance-ranked results in a matter of seconds.

■ Immediate results.

With InformIT Online Books, you can select the book you want and view the chapter or section you need immediately.

■ Cut, paste and annotate.

Paste code to save time and eliminate typographical errors. Make notes on the material you find useful and choose whether or not to share them with your work group.

■ Customized for your enterprise.

Customize a library for you, your department or your entire organization. You only pay for what you need.

Get your first 14 days FREE!

For a limited time, InformIT Online Books is offering its members a 10 book subscription risk-free for 14 days. Visit <http://www.informit.com/online-books> for details.

informIT
Online Books

informit.com/onlinebooks



Register Your Book

at www.awprofessional.com/register

You may be eligible to receive:


- Advance notice of forthcoming editions of the book
- Related book recommendations
- Chapter excerpts and supplements of forthcoming titles
- Information about special contests and promotions throughout the year
- Notices and reminders about author appearances, tradeshows, and online chats with special guests



Contact us

If you are interested in writing a book or reviewing manuscripts prior to publication, please write to us at:

Editorial Department
Addison-Wesley Professional
75 Arlington Street, Suite 300
Boston, MA 02116 USA
Email: AWPro@aw.com

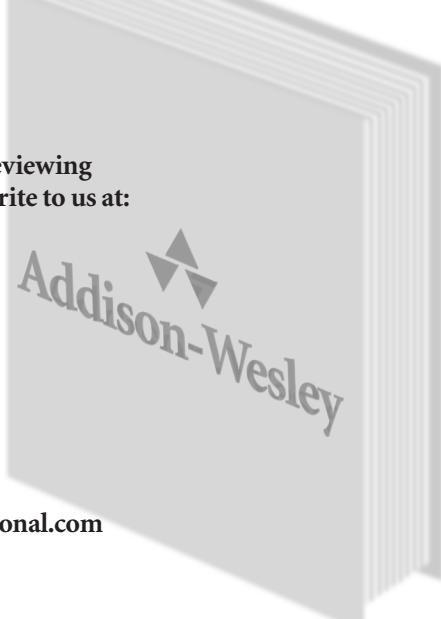

Visit us on the Web: <http://www.awprofessional.com>

Prentice Hall Professional Technical Reference

http://www.phptr.com/

Prentice Hall PTR InformIT InformIT Online Books Financial Times Prentice Hall ft.com PTG Interactive Reuters

PRENTICE HALL PTR TOMORROW'S SOLUTIONS FOR TODAY'S PROFESSIONALS

Prentice Hall Professional Technical Reference

Browse Book Series What's New User Groups Alliances Special Sales Contact Us

Search | Help | Home

Quick Search

PTR Favorites

- Find a Bookstore
- Book Series
- Special Interests
- Newsletters
- Press Room
- International
- Best Sellers
- Solutions Beyond the Book
- Shopping Bag

Keep Up to Date with PH PTR Online

We strive to stay on the cutting edge of what's happening in professional computer science and engineering. Here's a bit of what you'll find when you stop by www.phptr.com:

! **What's new at PHPTR?** We don't just publish books for the professional community, we're a part of it. Check out our convention schedule, keep up with your favorite authors, and get the latest reviews and press releases on topics of interest to you.

@ **Special interest areas** offering our latest books, book series, features of the month, related links, and other useful information to help you get the job done.

! **User Groups** Prentice Hall Professional Technical Reference's User Group Program helps volunteer, not-for-profit user groups provide their members with training and information about cutting-edge technology.

! **Companion Websites** Our Companion Websites provide valuable solutions beyond the book. Here you can download the source code, get updates and corrections, chat with other users and the author about the book, or discover links to other websites on this topic.

! **Need to find a bookstore?** Chances are, there's a bookseller near you that carries a broad selection of PTR titles. Locate a Magnet bookstore near you at www.phptr.com.

! **Subscribe today! Join PHPTR's monthly email newsletter!** Want to be kept up-to-date on your area of interest? Choose a targeted category on our website, and we'll keep you informed of the latest PHPTR products, author events, reviews and conferences in your interest area.

Visit our mailroom to subscribe today! http://www.phptr.com/mail_lists